



CKM CONNECTORS

**MIL-C-5015 POWER AND SIGNAL THREADED
CONNECTORS FOR RUGGED MILITARY
AND INDUSTRIAL APPLICATIONS**



JANUARY 2026

 Connitek® CKM Connector Series

Introducing CKM Connector Series

CKM connectors are designed to be compatible and intermateable with MIL-C-5015 connectors.

These threaded circular connectors are used in a wide range of electric and electronic equipment where reliability and environmental protection are required. Threaded **CKM** series connectors are designed according to MIL-C-5015 specification and comply with all its requirements of performance, reliability and interchangeability with products of other manufacturers.

Specially designed for military applications, nowadays are widely used also in the industry where strength, reliability and high availability in other countries is essential. A wide range of accessories allows to use these connectors in any environment, while a high number of contact arrangements covers every need of the customer.

These connectors may mount crimp or solder copper alloy contacts with silver or gold plating and also thermocouple contacts. CKM connectors series is the best solution for a high number of applications in various areas. Please contact our sales department for any application requirement.



Technical Data

Material and Platings

COMPONENT	MATERIAL	FINISH
Contacts	Copper Alloy	Silver plated (standard) Gold plated (optional)
Insulator	Polichloroprene -55 + 125°C (standard) Fire Resistant Elastomer (optional)	None
Shells, Coupling Nut, Backshells	Aluminum Alloy (standard) Stainless Steel (optional)	Bright Nickel Black Zinc Electroless Nickel (optional) None

1

T50 - Bright Nickel

RoHS Compliant




T51 - Black Zinc

RoHS Compliant




T59 - Electroless Nickel

(optional)
RoHS Compliant



Contacts

Contact Size	Rated Current at 20°C	Rated Current at 80°C	Max Contact Resistance	Wire Size
18	10 A	7,5 A	12,0 mΩ	18÷28 AWG
16	22 A	13 A	6,0 mΩ	16÷22 AWG
12	41 A	23 A	3,0 mΩ	12÷14 AWG
8	73 A	46 A	1,0 mΩ	8÷10 AWG
4	135 A	80 A	0,5 mΩ	4÷6 AWG
0	245 A	150 A	0,3 mΩ	0÷2 AWG

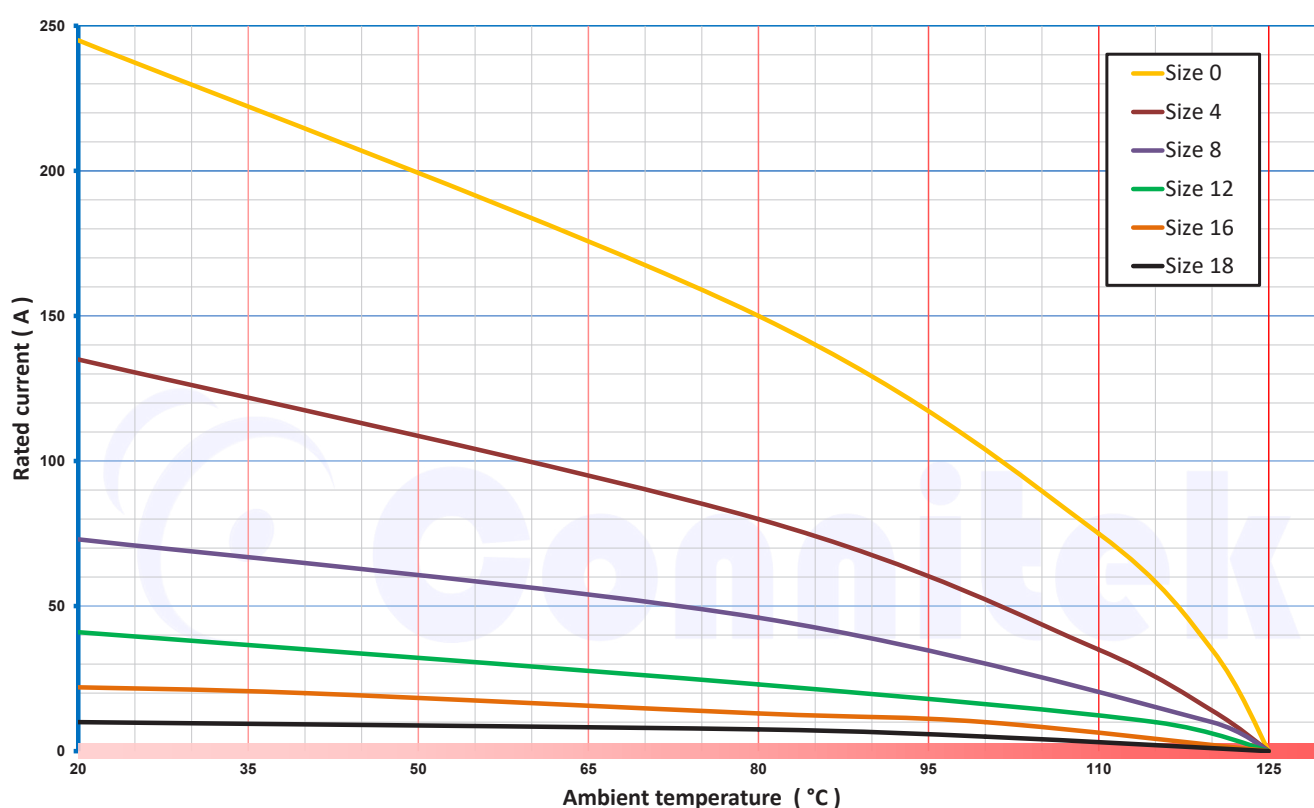


1

Insulator Service Rating


Contact Size	Operating Voltage Vdc	Operating Voltage Vac RMS	Test Voltage Vac RMS
INST.	250 V	200 V	1000 V
A	700 V	500 V	2000 V
D	1250 V	900 V	2800 V
E	1750 V	1250 V	3500 V
B	2450 V	1750 V	4500 V
C	4200 V	3000 V	7000 V

Insert Arrangements Alternate Position


Normal Position



Alternate Position
with socket contacts



Alternate Position
with pin contacts



Insert Arrangements

INSERT ARRANGEMENT	SERVICE RATING	CONTACT NUMBER	CONTACT SIZE					ALTERNATE POSITION - DEGREE			
			0	4	8	12	16	W	X	Y	Z
10SL-3	A	3					3				
10SL-4	A	2					2				
12S-3	A	2					2	70	145	215	290
14S-2	I	4					4		120	240	
14S-5	I	5					5		110		
14S-6	I	6					6	90			
14S-7	A	3					3	90	180	270	
14S-9	A	2					2	70	145	215	290
14S-A7	I	7					7				
16S-1	A	7					7	80			280
16S-4	D	2					2	35	110	250	325
16S-5	A	3					3	70	145	215	290
16S-8	A	5					5		170	265	
16-7	A	3			1		2	80	110	250	280
16-9	A	4				2	2	35	110	250	325
16-10	A	3				3		90	180	270	
16-11	A	2				2		35	110	250	325
16-12	A	1		1							
18-1	I	10					10	70	145	215	290
18-3	D	2				2		35	110	250	325
18-4	D	4					4	35	110	250	325
18-6	D	1		1							
18-06	A	6				4	2		180		
18-8	A	8				1	7	70			290
18-9	I	7				2	5	80	110	250	280
18-10	A	4				4			120	240	
18-11	A	5				5			170	265	
18-12	A	6					6	80			280
18-19	A	10					10		120	240	
18-22	D	3					3	70	145	215	290
20-2	D	1	1								
20-3	D	3				3		70	145	215	290
20-4	D	4				4		45	110	250	
20-6	D	3					3	70	145	215	290
20-7	A	8					8	80	110	250	280

* For all non-standard insert arrangements, please contact the factory

Insert Arrangements

INSERT ARRANGEMENT	SERVICE RATING	CONTACT NUMBER	CONTACT SIZE					ALTERNATE POSITION - DEGREE			
			0	4	8	12	16	W	X	Y	Z
20-11	I	13					13				
20-15	A	7				7		80			280
20-17	A	6				5	1	90	180	270	
20-18	A	9				3	6	35	110	250	325
20-19	A	3			3			90	180	270	
20-21	A	9				1	8	35	110	250	325
20-22	A	6			3		3	80	110	250	280
20-23	A	2			2			35	110	250	325
20-24	A	4			2		2	35	110	250	325
20-27	A	14					14	35	110	250	325
20-29	A	17					17	80			280
20-33	A	11					11				280
20-A48	I	19					19		80	220	
22-1	D	2			2			35	110	250	325
22-2	D	3			3			70	145	215	290
22-4	A	4			2	2		35	110	250	325
22-5	D	6				2	4	35	110	250	325
22-7	E	1	1								
22-9	E	3				3		70	145	215	290
22-12	D	5			2		3	80	110	250	280
22-14	A	19					19	80	110	250	280
22-18	A	8					8	80	110	250	280
22-19	A	14					14	80	110	250	280
22-21	A	3	1				2	80	110	250	280
22-22	A	4			4				110	250	
22-23	A	8				8		35		250	
22-28	A	7				7		80			280
24-2	D	7				7		80			280
24-5	A	16					16	80	110	250	280
24-6	A	8				8		80	110	250	280
24-06	D	6			4		2	40			320
24-7	A	16				2	14	80	110	250	280
24-07	D	7				7			80		280
24-9	A	2		2				35	110	250	325
24-10	A	7			7			80			280
24-11	A	9			3	6		35	110	250	325
24-19	A	12					12				
24-12	A	5		2		3		80	110	250	280
24-20	D	11				2	9	80	110	250	280
24-22	D	4			4			45	110	250	
24-A25	A	25					25	80	110	250	280
24-27	E	7					7	80			280
24-28	I	24					24	80	110	250	280
24-A28	I	28					28	65	146	235	
28-1	A	9			3	6		80	110	250	280
28-2	D	14				2	12	35	110	250	325

* For all non-standard insert arrangements, please contact the factory

Insert Arrangements

INSERT ARRANGEMENT	SERVICE RATING	CONTACT NUMBER	CONTACT SIZE						ALTERNATE POSITION - DEGREE			
			0	4	8	12	16	18	W	X	Y	Z
28-3	E	3			3				70	145	215	290
28-6	D	3		3					70	145	215	290
28-9	D	12				6	6		80	110	250	280
28-A9	A	9		4			5		110	250	260	280
28-10	A	7		2	2	3			80	110	250	280
28-11	A	22				4	18		80	110	250	280
28-12	A	26					26		90	180	270	
28-15	A	35					35		80	110	250	280
28-16	A	20					20		80	110	250	280
28-18	I	12					12		70	145	215	290
28-20	A	14				10	4		80	110	250	280
28-21	A	37					37		80	110	250	280
28-22	D	6		3			3		70	145	215	290
28-51	D	12				12			80	135	195	
32-1	D	5	2			3			80	110	250	280
32-2	E	5		3			2		70	145	215	290
32-5	D	2	2						35	110	250	325
32-6	A	23		2	3	2	16		80	110	250	280
32-7	I	35				7	28		80	125	235	280
32-8	A	30				6	24		80	125	235	280
32-9	D	14		2			12		80	110	250	280
32-13	D	23				5	18		80	110	250	280
32-013	D	13				13			65	130	230	295
32-15	D	8	2			6			35	110	250	280
32-17	D	4		4					45	110	250	
32-A30	A	30				10	20					
32-A55	A	55					55		80	110	250	280
32-22	A	54					54		80	110	250	280
32-31	A	31					31		215	125	215	290
32-59	A	42			2		40		36	108	252	324
32-68	A	16		4			12		65	135	225	275
36-3	D	6	3			3			70	145	215	290
36-5	A	4	4							120	240	
36-7	A	47				7	40		80	110	250	280
36-9	A	31		1	2	14	14		80	125	235	280
36-10	A	48					48		80	125	235	280
36-15	A	35					35		60	125	245	305
40-9	A	47			1	22	24		65	125	225	310
40-35	D	35				35			70	130	230	290
40-53	A	60					60		80	110	250	280
40-56	A	31					85		72	144	216	288
40-A8	E	8	4				4		35	110	250	325
40-B19	A	19			19				35	105	255	325
40-150	I	150						150				


* For all non-standard insert arrangements, please contact the factory

Front View of Pin Inserts

Contact Size Legend




1 CONTACT

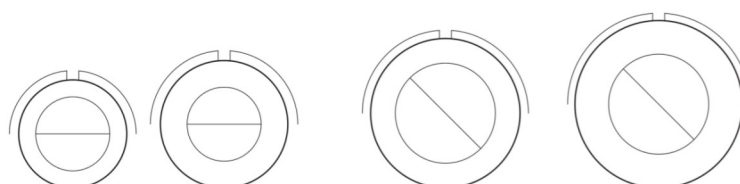


ARRANGEMENT	16-12	18-6	20-2	22-7
NO. OF CONTACTS	1	1	1	1
CONTACT SIZE	4	4	0	0
SERVICE RATING	A	D	D	E

2 CONTACTS

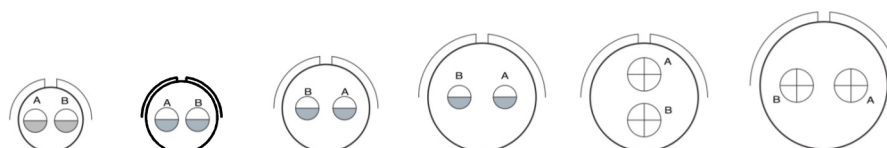

ARRANGEMENT	10SL-4	12S-3	14S-9	16S-4	16-11	18-3
NO. OF CONTACTS	2	2	2	2	2	2
CONTACT SIZE	16	16	16	16	12	12
SERVICE RATING	A	A	A	D	A	D

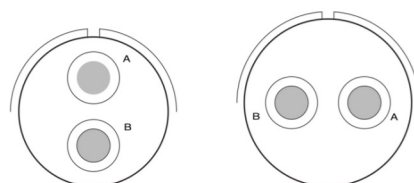


ARRANGEMENT	20-23	22-1
NO. OF CONTACTS	2	2
CONTACT SIZE	8	8
SERVICE RATING	A	D

Front View of Pin Inserts

Contact Size Legend




2 CONTACTS

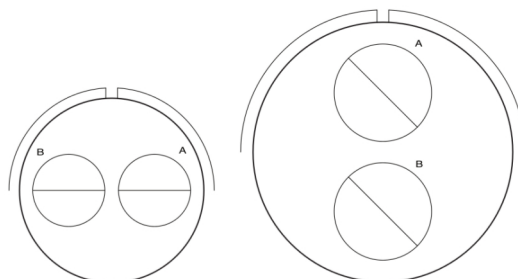


ARRANGEMENT	24-9	32-5
NO. OF CONTACTS	2	2
CONTACT SIZE	4	0
SERVICE RATING	A	D

3 CONTACTS

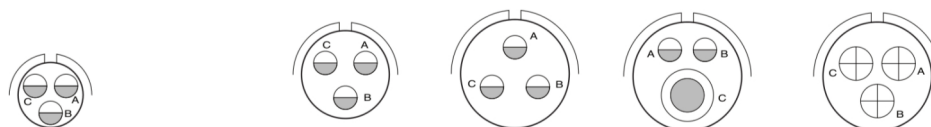

ARRANGEMENT	10SL-3	14S-7	16S-5	16-7	16-10
NO. OF CONTACTS	3	3	3	3	3
CONTACT SIZE	16	16	16	1-8, 2-16	12
SERVICE RATING	A	A	A	A	A

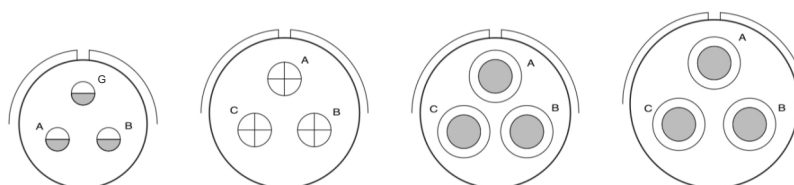


ARRANGEMENT	18-22	20-3	20-19	22-2
NO. OF CONTACTS	3	3	3	3
CONTACT SIZE	16	12	8	8
SERVICE RATING	D	D	A	D

Front View of Pin Inserts


Contact Size Legend



3 CONTACTS

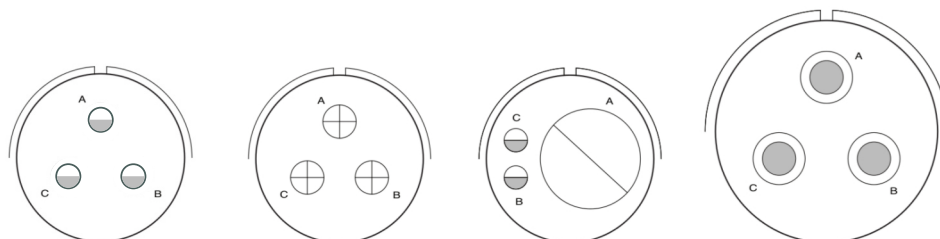


ARRANGEMENT	20-6	22-9	22-21	28-3
NO. OF CONTACTS	3	3	3	3
CONTACT SIZE	16	12	1-0, 2-16	8
SERVICE RATING	D	E	A	E



ARRANGEMENT	28-6
NO. OF CONTACTS	3
CONTACT SIZE	4
SERVICE RATING	D

4 CONTACTS

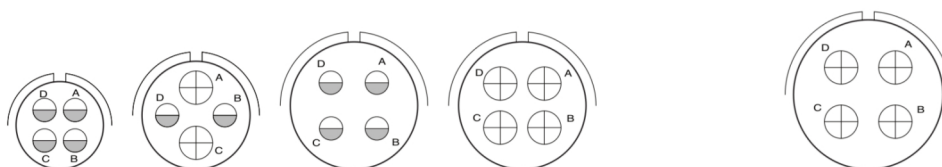


ARRANGEMENT	14S-2	16-9	18-4	18-10	20-4
NO. OF CONTACTS	4	4	4	4	4
CONTACT SIZE	16	2-12, 2-16	16	12	4
SERVICE RATING	I	A	D	A	D

Front View of Pin Inserts


Contact Size Legend



4 CONTACTS

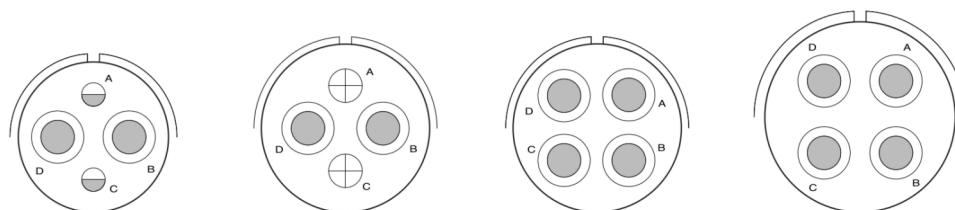

ARRANGEMENT	20-24	22-4	22-22	24-22
NO. OF CONTACTS	4	4	4	4
CONTACT SIZE	2-8, 2-16	2-8, 2-12	8	8
SERVICE RATING	A	A	A	D

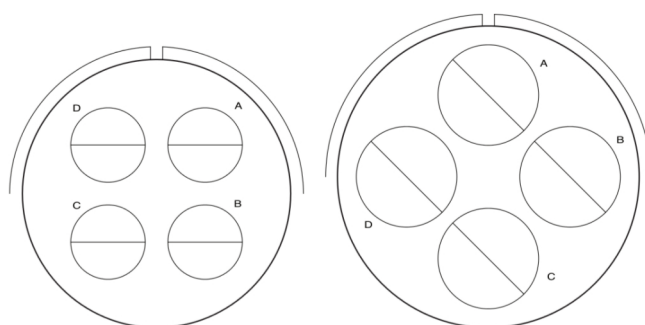

ARRANGEMENT	32-17	36-5
NO. OF CONTACTS	4	4
CONTACT SIZE	4	0
SERVICE RATING	D	A

5 CONTACTS



ARRANGEMENT	14S-5	16S-8	18-11
NO. OF CONTACTS	5	5	5
CONTACT SIZE	16	16	12
SERVICE RATING	I	A	A


1

Front View of Pin Inserts


Contact Size Legend



5 CONTACTS

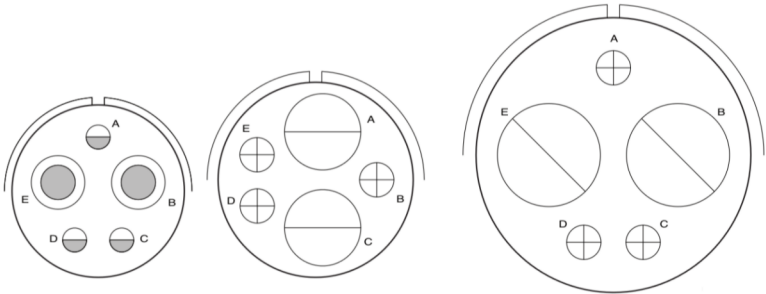

ARRANGEMENT	22-12	24-12	32-1
NO. OF CONTACTS	5	5	5
CONTACT SIZE	2-8, 3-16	2-4, 3-12	2-0, 3-12
SERVICE RATING	D	A	D




ARRANGEMENT	32-2
NO. OF CONTACTS	5
CONTACT SIZE	3-4, 2-16
SERVICE RATING	E

Front View of Pin Inserts


Contact Size Legend




6 CONTACTS

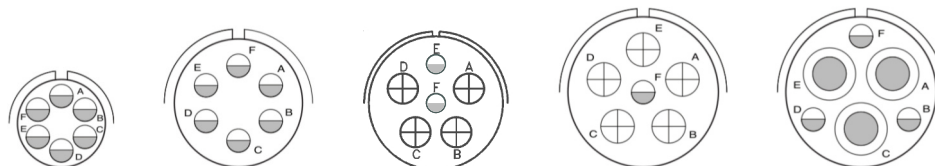

ARRANGEMENT	14S-6	18-12	18-06	20-17	20-22
NO. OF CONTACTS	6	6	6	6	6
CONTACT SIZE	16	16	4-12, 2-16	5-12, 1-16	3-8, 3-16
SERVICE RATING	I	A	A	A	A

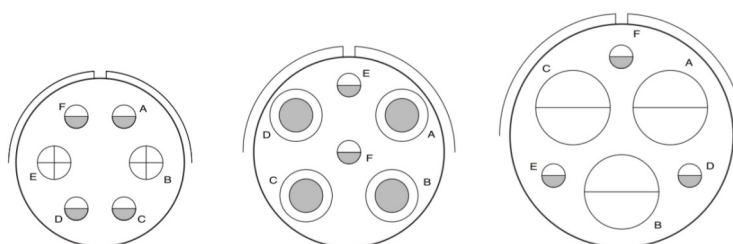

ARRANGEMENT	22-5	24-06	28-22
NO. OF CONTACTS	6	6	6
CONTACT SIZE	2-12, 4-16	4-8, 2-16	3-4, 3-16
SERVICE RATING	D	D	D




ARRANGEMENT	36-3
NO. OF CONTACTS	6
CONTACT SIZE	3-0, 3-12
SERVICE RATING	D

Front View of Pin Inserts


Contact Size Legend



7 CONTACTS

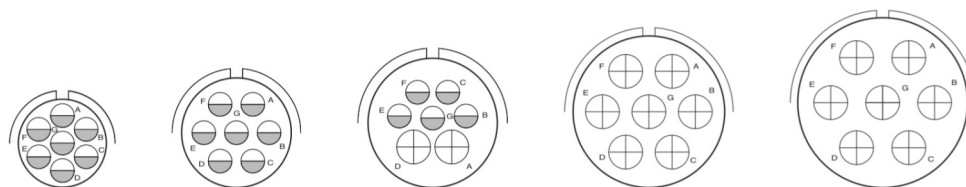

ARRANGEMENT	14S-A7	16S-1	18-9	20-15	22-28
NO. OF CONTACTS	7	7	7	7	7
CONTACT SIZE	16	16	2-12, 5-16	12	12
SERVICE RATING	I	A	I	A	A

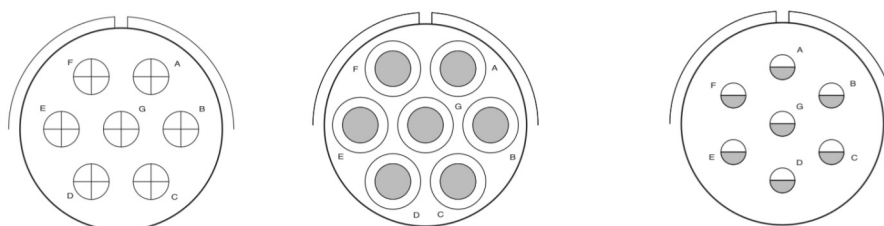

ARRANGEMENT	24-2	24-10	24-27
NO. OF CONTACTS	7	7	7
CONTACT SIZE	12	8	16
SERVICE RATING	D	A	E




ARRANGEMENT	24-07	28-10
NO. OF CONTACTS	7	7
CONTACT SIZE	12	2-4, 3-8, 3-12
SERVICE RATING	D	G=D, Bal.=A

Front View of Pin Inserts

Contact Size Legend




8 CONTACTS

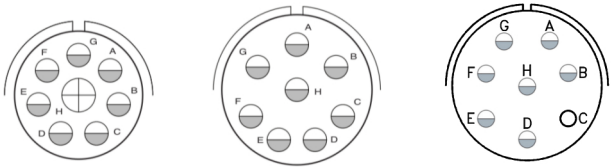

ARRANGEMENT	18-8	20-7	22-18
NO. OF CONTACTS	8	8	8
CONTACT SIZE	1-12, 7-16	16	16
SERVICE RATING	A	A,B,H,G=D - Bal.=A	A

1

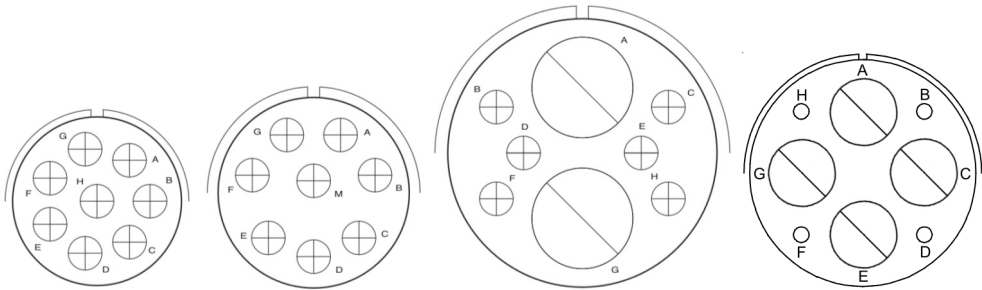


ARRANGEMENT	22-23	24-6	32-15	40-A8
NO. OF CONTACTS	8	8	8	8
CONTACT SIZE	12	12	2-0, 6-12	4-0, 4-16
SERVICE RATING	H=D - Bal.=A	A,G,H=D - Bal.=A	D	E

Front View of Pin Inserts


Contact Size Legend



9 CONTACTS

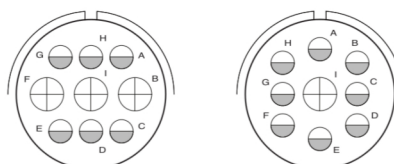


ARRANGEMENT	20-18	20-21
NO. OF CONTACTS	9	9
CONTACT SIZE	3-12, 6-16	1-12, 8-16
SERVICE RATING	A	A

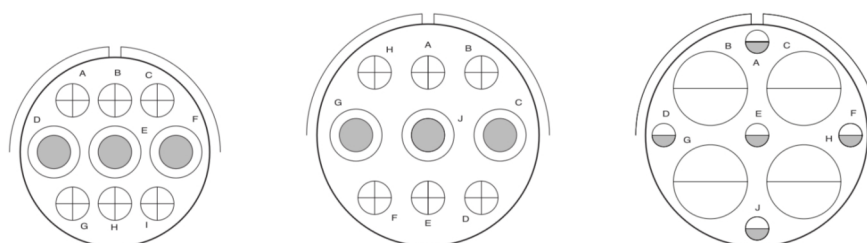



ARRANGEMENT	24-11	28-1	28A-9
NO. OF CONTACTS	9	9	9
CONTACT SIZE	3-8, 6-12	3-8, 6-12	4-4, 5-16
SERVICE RATING	A	A,J,E=D - Bal.=A	A

Front View of Pin Inserts

Contact Size Legend





10 CONTACTS



ARRANGEMENT	18-1	18-19
NO. OF CONTACTS	10	10
CONTACT SIZE	16	16
SERVICE RATING	B,C,F,G=A - Bal.=I	A

1

11 CONTACTS




ARRANGEMENT	20-33	24-20
NO. OF CONTACTS	11	11
CONTACT SIZE	16	2-12, 9-16
SERVICE RATING	A	D

Front View of Pin Inserts


Contact Size Legend



12 CONTACTS

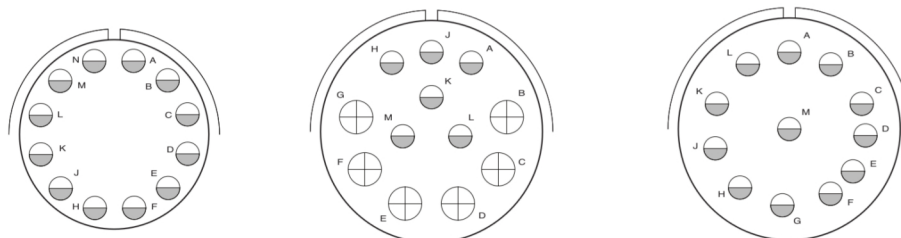


ARRANGEMENT	24-19	28-9	28-18
NO. OF CONTACTS	12	12	12
CONTACT SIZE	16	6-12, 6-16	16
SERVICE RATING	A	D	M=C - A,B=A - G,H,J,K,L=D - Bal.=I



ARRANGEMENT	28-51
NO. OF CONTACTS	12
CONTACT SIZE	12
SERVICE RATING	D

13 CONTACTS

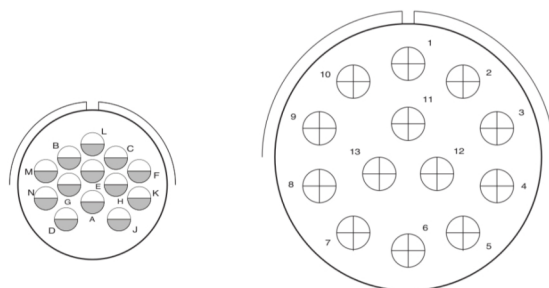




ARRANGEMENT	20-11	32-013
NO. OF CONTACTS	13	13
CONTACT SIZE	16	12
SERVICE RATING	I	D

Front View of Pin Inserts



Contact Size Legend



14 CONTACTS



ARRANGEMENT	20-27	22-19	28-2
NO. OF CONTACTS	14	14	14
CONTACT SIZE	16	16	2-12, 12-16
SERVICE RATING	A	A	D






ARRANGEMENT	28-20	32-9
NO. OF CONTACTS	14	14
CONTACT SIZE	10-12, 4-16	2 - 4 , 12-16
SERVICE RATING	A	D

Front View of Pin Inserts

Contact Size Legend




16 CONTACTS





ARRANGEMENT	24-5	24-7	32-68
NO. OF CONTACTS	16	16	16
CONTACT SIZE	16	2-12, 14-16	4-4, 12-16
SERVICE RATING	A	A	A


17 CONTACTS




19 CONTACTS



ARRANGEMENT	20-29	20-A48	22-14
NO. OF CONTACTS	17	19	19
CONTACT SIZE	16	16	16
SERVICE RATING	A	I	A



20 CONTACTS




ARRANGEMENT	40-B19	28-16
NO. OF CONTACTS	19	20
CONTACT SIZE	8	16
SERVICE RATING	A	A

Front View of Pin Inserts

Contact Size Legend



22 CONTACTS



28-11

ARRANGEMENT

NO. OF CONTACTS

22


CONTACT SIZE

4-12, 18-16

SERVICE RATING

A

23 CONTACTS



32-6

ARRANGEMENT

NO. OF CONTACTS


23

CONTACT SIZE

2-4, 3-8, 2-12, 16-16

SERVICE RATING

A




32-13

23

5-12, 18-16

D

24 CONTACTS



24-28

ARRANGEMENT

NO. OF CONTACTS

24

CONTACT SIZE

16

SERVICE RATING

I


1

Front View of Pin Inserts

Contact Size Legend



25 CONTACTS



ARRANGEMENT

24-A25

NO. OF CONTACTS

25


CONTACT SIZE

16

SERVICE RATING

I

26 CONTACTS



ARRANGEMENT

28-12

NO. OF CONTACTS

26


CONTACT SIZE

16

SERVICE RATING

A

28 CONTACTS




24-A28

28

16

I

30 CONTACTS



ARRANGEMENT

32-8

NO. OF CONTACTS

30


CONTACT SIZE

6-12, 24-16

SERVICE RATING

A

31 CONTACTS




32-A30

30

10-12, 20-16

A




32-31

31

16

A



36-9

31

1-4, 2-8, 14-12, 14-16


A

Front View of Pin Inserts


Contact Size Legend



35 CONTACTS

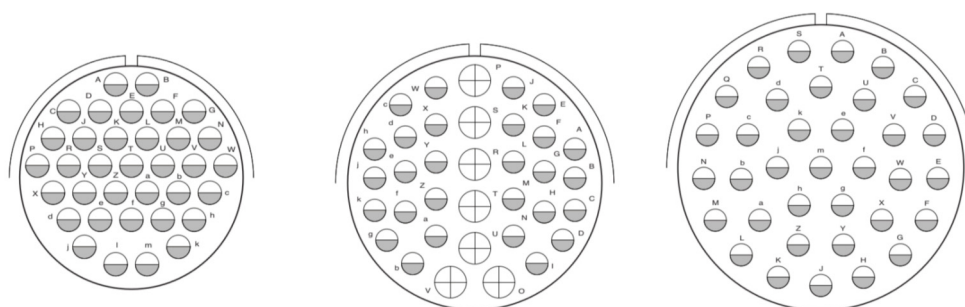


ARRANGEMENT	28-15	32-7	36-15
NO. OF CONTACTS	35	35	35
CONTACT SIZE	16	7-12, 28-16	16
SERVICE RATING	A	A,B,h,j=l - Bal.=A	M=D - Bal.=A



ARRANGEMENT	40-35
NO. OF CONTACTS	35
CONTACT SIZE	12
SERVICE RATING	D

37 CONTACTS




ARRANGEMENT	28-21
NO. OF CONTACTS	37
CONTACT SIZE	16
SERVICE RATING	A

Front View of Pin Inserts

Contact Size Legend





42 CONTACTS




ARRANGEMENT	32-59
NO. OF CONTACTS	42
CONTACT SIZE	2-8, 40-16
SERVICE RATING	A

47 CONTACTS




ARRANGEMENT	36-7	40-9
NO. OF CONTACTS	47	47
CONTACT SIZE	7-12, 40-16	1-8, 22-12, 24-16
SERVICE RATING	A	A

48 CONTACTS



54 CONTACTS




ARRANGEMENT	36-10	32-22
NO. OF CONTACTS	48	54
CONTACT SIZE	16	16
SERVICE RATING	A	A

Front View of Pin Inserts

Contact Size Legend



55 CONTACTS



ARRANGEMENT

32-A55

NO. OF CONTACTS

55


CONTACT SIZE

16

SERVICE RATING


A

60 CONTACTS



40-53

85 CONTACTS

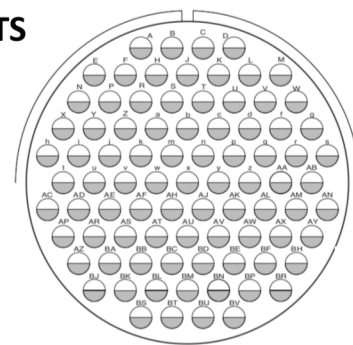

40-56

ARRANGEMENT

NO. OF CONTACTS

60

85

CONTACT SIZE

16


16

SERVICE RATING

A

A

150 CONTACTS



40-150

ARRANGEMENT

NO. OF CONTACTS

150

CONTACT SIZE

18

SERVICE RATING

I

HOW TO ORDER

FR	CKM	31	06	A	20-27	P	X	T03	CGMXX	T50
----	-----	-----	-----	---	-----	---	---	-----	-----	-----
1	2	3	4	5	6	7	8	9	10	11

1 - Omit for Standard Chloroprenic Elastomer
FR : Fire Resistant Elastomer (optional)

2 – CKM: Thread Coupling MIL-C-5015 Compatible

3 – 31: Solder contacts
41: Crimp contacts (Section 3)

4 – Style: 00 - 01 - 02 - 06 - 08 (Section 2)

5 – 10 Class type: A, AF, F, MXX, PGXX, A...CGMXX (Section 2)

6 – Size and Contacts arrangement (Section 1)

7 – P: Male contacts
S: Female contacts

8 – Insert Rotation - Omit for standard
Alternate insert position (Section 1)

9 – Contacts deviations: Omit for Silver Plated
T03: Gold Plated
XX: Modified Crimp Bucket
LC: Less Contacts
(Section 3)

10 - Class type:
Omit for A, AF and F classes
A...CGMXX, A...MXX, A...PGXX (Section 2)

11 - Connector Finish:
T50 Bright Nickel
T51 Black Zinc
T54 Stainless Steel (optional)
T59 Electroless Nickel (optional)

Classes and Styles



CKM3100A20-27PT50
Front Panel Receptacle with Backshell



CKM3101A20-27PT50
In Line Receptacle with Backshell



CKM3100A20-27PCGMXXT50
Front Panel Receptacle with
environmental Cable Clamp



CKM3101A20-27PCGMXXT50
In Line Receptacle with
environmental Cable Clamp



CKM3102A20-27PT50
Front Panel



CKM3100AF20-27PT50
CKM3100F20-27PT50
Front panel Receptacle with General
Duty Cable Clamp



CKM3101AF20-27PT50
CKM3101F20-27PT50
In Line Receptacle with General
Duty Cable Clamp



CKM3100A20-27PMXXT50
Front panel Receptacle
with Metric or PG Thread



CKM3101A20-27PMXXT50
In Line Receptacle with Metric or PG
Thread

Classes and Styles



CKM3106A20-27PT50
Straight Plug with Backshell



CKM3108A20-27PT50
90° Plug with Backshell



CKM3106A20-27PCGMXXT50
Straight Plug with Environmental
Cable Clamp



CKM3108A20-27PCGMXXT50
90° Plug with Environmental
Cable Clamp



CKM3106AF20-27PT50
CKM3106F20-27PT50
Straight Plug with General
Duty Cable Clamp



CKM3108AF20-27PT50
CKM3108F20-27PT50
90° Plug with General
Duty Cable Clamp





CKM3106A20-27PMXXT50
Straight Plug with Metric
or PG Thread



CKM3108A20-27PMXXT50
90° Plug With Metric
or PG Thread

Front Panel Receptacle with cable clamp Mounting thread

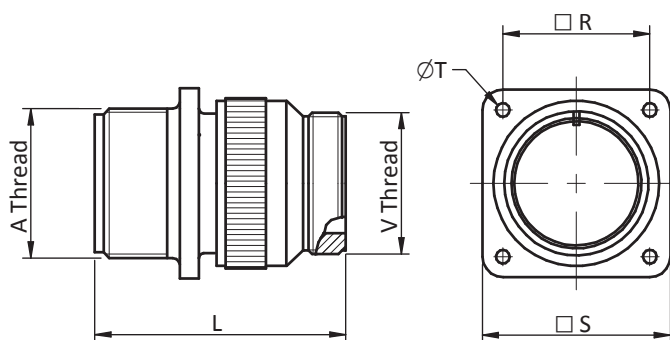
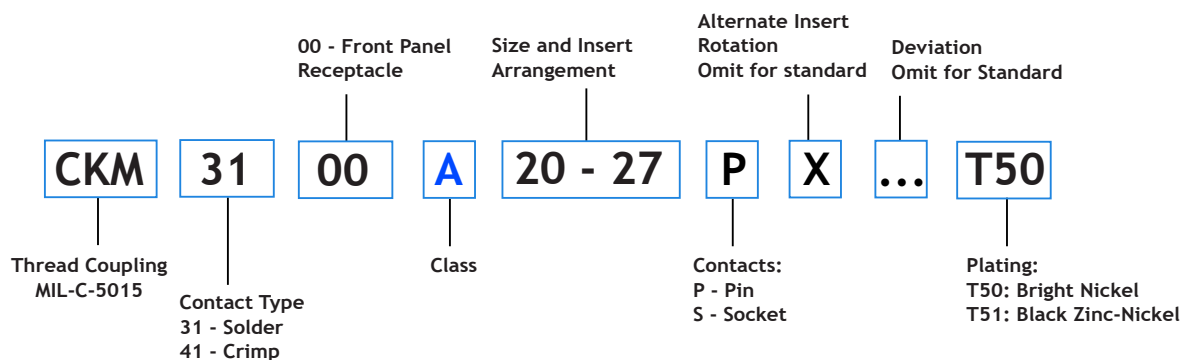


Shell Size	A Thread	L max	R ± 0,2	S ± 0,2	T +0,1/-0	V Thread
10SL	0.6250 - 24UNEF	44,0	18,25	25,4	3,2	0,6250-24UNEF
12S	0,750-20UNEF	40,0	20,62	27,8	3,2	0,625-24UNEF
14S	0.8750 - 20UNEF	45,0	23,0	30,4	3,2	0,7500-20UNEF
16S	1.0000 - 20UNEF	45,0	24,60	32,5	3,2	0,8750-20UNEF
16	1.0000 - 20UNEF	58,0	24,60	32,5	3,2	0,8750-20UNEF
18	1.1250 - 18UNEF	58,0	27,0	35,0	3,2	1,0000-20UNEF
20	1.2500 - 18UNEF	58,0	29,4	38,0	3,2	1,1875-18UNEF
22	1.3750 - 18UNEF	58,0	31,75	41,0	3,2	1,1875-18UNEF
24	1.5000 - 18UNEF	60,0	34,9	44,5	3,7	1,4375-18UNEF
28	1.7500 - 18UNS	66,0	39,7	50,9	3,7	1,4375-18UNEF
32	2.0000 - 18UNS	71,0	44,5	57,0	4,3	1,7500-18UNS
36	2.2500 - 16UN	77,0	49,2	63,5	4,3	2,0000-18UNS
40	2.5000 - 16UN	77,0	55,55	69,9	4,3	2,2500-16UN

Application Notes:

- Front Panel Receptacle with thread for clamp (not included, see Section 3)
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

Front Panel Receptacle with Environmental cable clamp

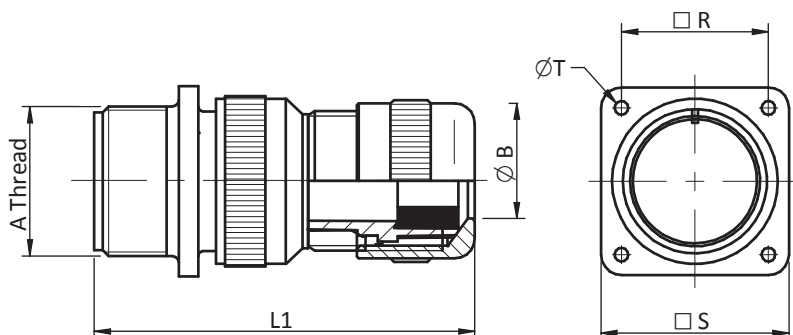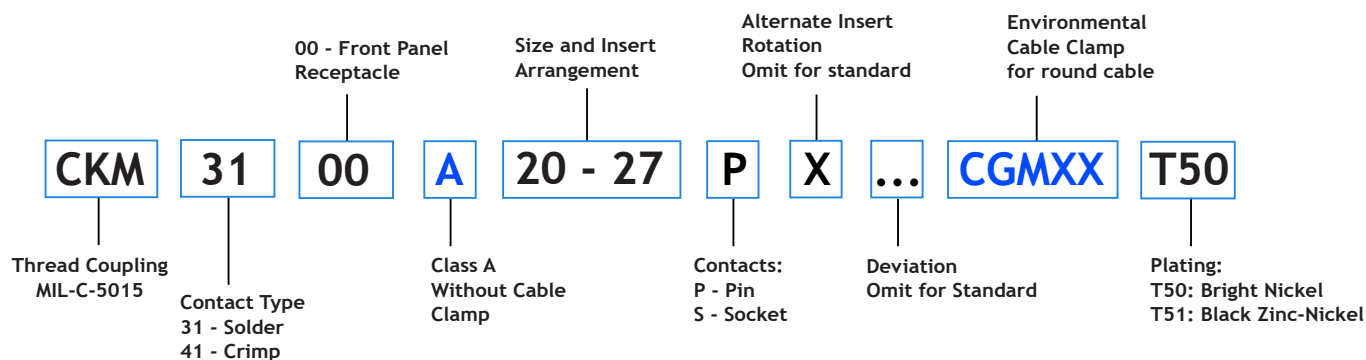




2

Shell Size	A Thread	XX	ØB	L1 max	R ± 0,2	S ± 0,2	T 0,1/-0	V Thread
10SL	0.6250 - 24UNEF	9	2÷9	60,0	18,25	25,4	3,2	0,6250-24UNEF
12S	0,750-20UNEF	9	2-9	60,0	20,62	27,8	3,2	0,625-24UNEF
14S	0.8750 - 20UNEF	11	4÷11	60,0	23,0	30,4	3,2	0,7500-20UNEF
16S	1.0000 - 20UNEF	11	4÷11	60,0	24,60	32,5	3,2	0,8750-20UNEF
16	1.0000 - 20UNEF	11	4÷11	70,0	24,60	32,5	3,2	0,8750-20UNEF
18	1.1250 - 18UNEF	11/18	4÷11/7÷17	70,0	27,0	35,0	3,2	1,0000-20UNEF
20	1.2500 - 18UNEF	11/18	4÷11/7÷17	70,0	29,4	38,0	3,2	1,1875-18UNEF
22	1.3750 - 18UNEF	18	7÷17	70,0	31,75	41,0	3,2	1,1875-18UNEF
24	1.5000 - 18UNEF	18/21/25	7÷17/12÷21/18÷25	80,0	34,9	44,5	3,7	1,4375-18UNEF
28	1.7500 - 18UNS	18/21/25	7÷17/12÷21/18÷25	80,0	39,7	50,9	3,7	1,4375-18UNEF
32	2.0000 - 18UNS	21/25	12÷21/18÷25	80,0	44,5	57,0	4,3	1,7500-18UNS
36	2.2500 - 16UN	21/25	12÷21/18÷25	95,0	49,2	63,5	4,3	2,0000-18UNS
40	2.5000 - 16UN	21/25	12÷21/18÷25	95,0	55,55	69,9	4,3	2,2500-16UN

Application Notes:

- Front panel Receptacle with Environmental cable clamp, suitable for shielding protection
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

Front Panel Receptacle with cable clamp

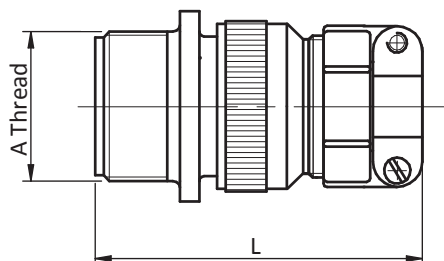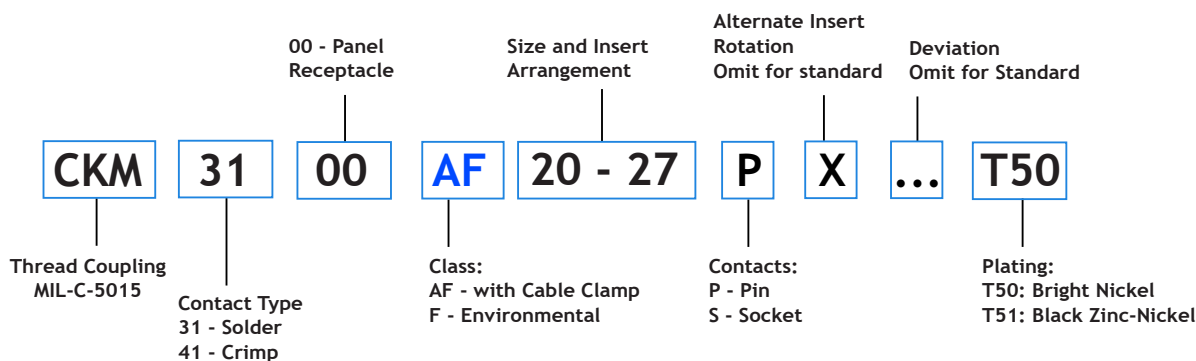



2

Shell Size	A Thread	L max	R $\pm 0,2$	S $\pm 0,2$	T $+0,1/-0$
10SL	0.6250 - 24UNEF	55,0	18,25	25,4	3,2
12S	0,750-20UNEF	55	20,62	27,8	3,2
14S	0.8750 - 20UNEF	58,0	23,0	30,4	3,2
16S	1.0000 - 20UNEF	60,0	24,60	32,5	3,2
16	1.0000 - 20UNEF	72,0	24,60	32,5	3,2
18	1.1250 - 18UNEF	73,0	27,0	35,0	3,2
20	1.2500 - 18UNEF	74,0	29,4	38,0	3,2
22	1.3750 - 18UNEF	74,0	31,75	41,0	3,2
24	1.5000 - 18UNEF	76,0	34,9	44,5	3,7
28	1.7500 - 18UNS	83,0	39,7	50,9	3,7
32	2.0000 - 18UNS	90,0	44,5	57,0	4,3
36	2.2500 - 16UN	97,0	49,2	63,5	4,3
40	2.5000 - 16UN	115,0	55,55	69,9	4,3

Application Notes:

- Front Panel Receptacle with cable clamp included
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

Front Panel Receptacle with Metric or PG thread

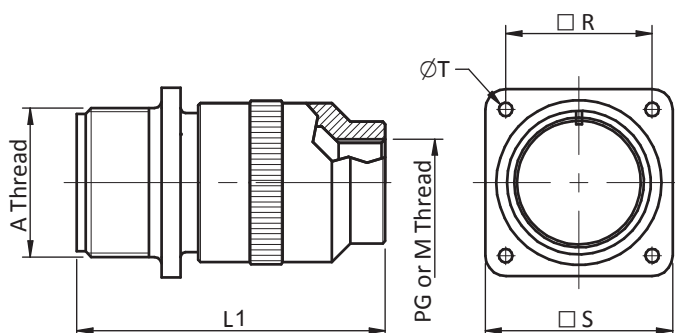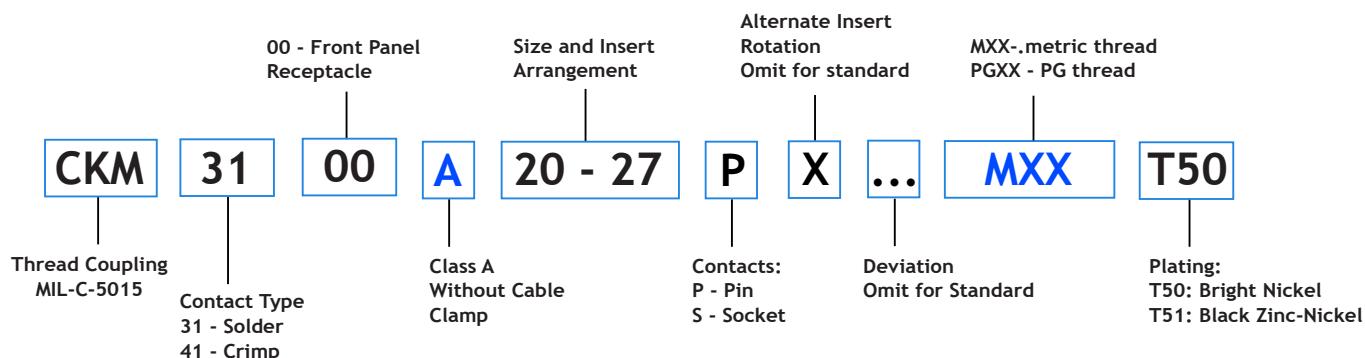




2

Shell Size	A Thread	MXX Fine Pitch 1,5	PGXX	L1 max	R $\pm 0,2$	S $\pm 0,2$	T $+0,1/-0$
10SL	0.6250 - 24UNEF	M12	PG7/PG9/PG11	50,0	18,25	25,4	3,2
12S	0,750-20UNEF	M12	PG7/PG9/PG11	50	20,62	27,8	3,2
14S	0.8750 - 20UNEF	M16	PG11/PG16	52,5	23,0	30,4	3,2
16S	1.0000 - 20UNEF	M16	PG11/PG16	52,5	24,60	32,5	3,2
16	1.0000 - 20UNEF	M16	PG11/PG16	61,0	24,60	32,5	3,2
18	1.1250 - 18UNEF	M20	PG11//PG16/PG21	66,5	27,0	35,0	3,2
20	1.2500 - 18UNEF	M25	PG16/PG21/PG29	69,5	29,4	38,0	3,2
22	1.3750 - 18UNEF	M25	PG16/PG21/PG29	69,5	31,75	41,0	3,2
24	1.5000 - 18UNEF	M32	PG16/PG21/PG29	71,5	34,9	44,5	3,7
28	1.7500 - 18UNS	M32	PG16/PG21/PG29	76,5	39,7	50,9	3,7
32	2.0000 - 18UNS	M36	PG21/PG29	82,5	44,5	57,0	4,3
36	2.2500 - 16UN	M40	PG21/PG29	87,5	49,2	63,5	4,3
40	2.5000 - 16UN	M50	PG21/PG29/PG36	92,5	55,55	69,9	4,3

Application Notes:

- Front panel Receptacle with Metric or PG internal thread. Suitable for clamp or adapter (not included)
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

In Line Receptacle with cable clamp Mounting thread

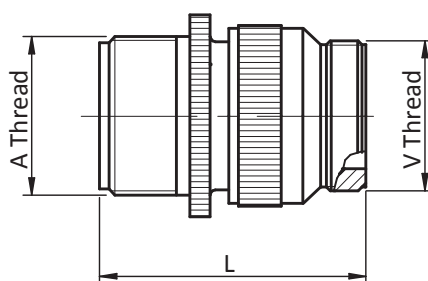
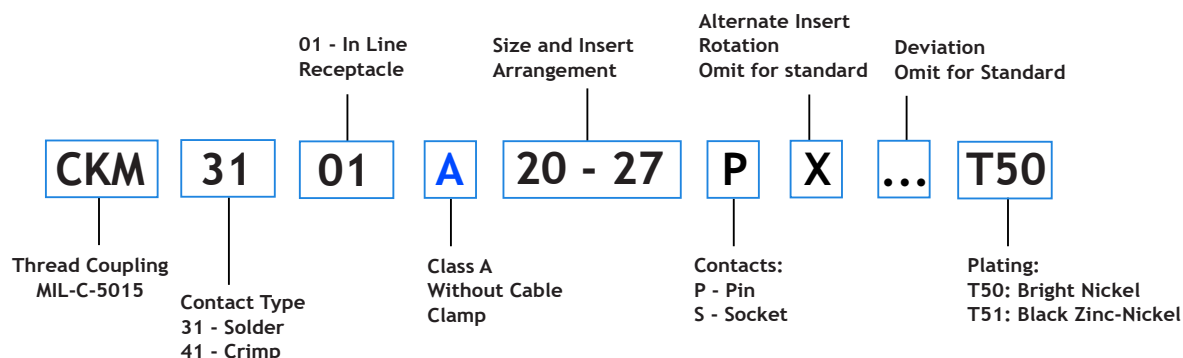


Shell Size	A Thread	L max	Q ±0,1	V Thread
10SL	0.6250 - 24UNEF	44,0	21,8	0,6250-24UNEF
12S	0,750 - 20UNEF	44,60	25,0	0,6250-24UNEF
14S	0.8750 - 20UNEF	45,0	28,8	0,7500-20UNEF
16S	1.0000 - 20UNEF	45,0	30,5	0,8750-20UNEF
16	1.0000 - 20UNEF	58,0	30,5	0,8750-20UNEF
18	1.1250 - 18UNEF	58,0	33,8	1,0000-20UNEF
20	1.2500 - 18UNEF	58,0	36,9	1,1875-18UNEF
22	1.3750 - 18UNEF	58,0	39,5	1,1875-18UNEF
24	1.5000 - 18UNEF	60,0	43,9	1,4375-18UNEF
28	1.7500 - 18UNS	66,0	48,4	1,4375-18UNEF
32	2.0000 - 18UNS	71,0	56,0	1,7500-18UNS
36	2.2500 - 16UN	77,0	62,4	2,0000-18UNS
40	2.5000 - 16UN	77,0	68,6	2,2500-16UN

Application Notes:

- In Line Receptacle with thread for Clamp (not included, see Section 3)
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

In Line Receptacle with Environmental cable clamp


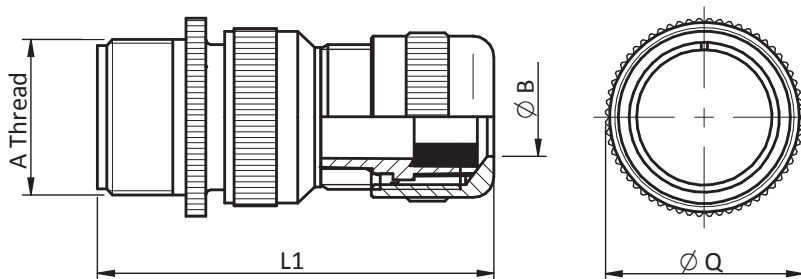
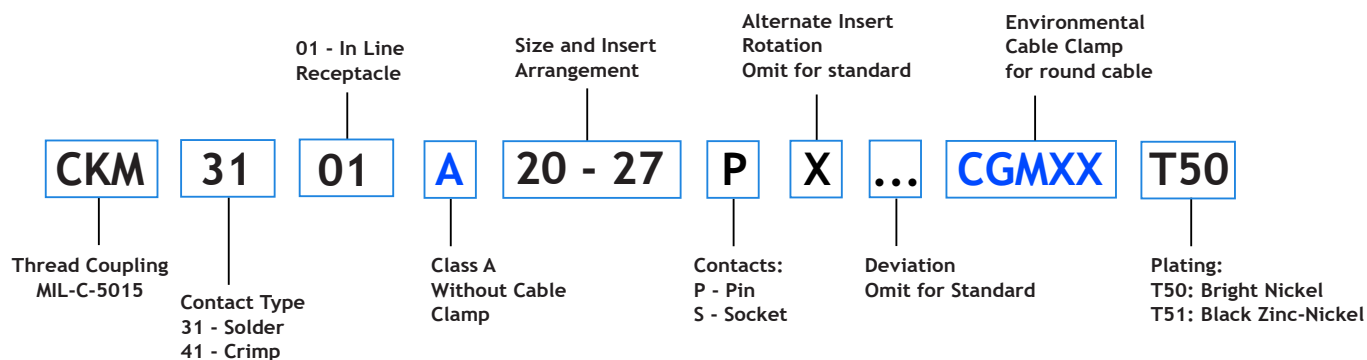


Shell Size	A Thread	XX	ØB	L1 max	Q ±0,1
10SL	0.6250 - 24UNEF	9	2÷9	60,0	21,8
12S	0,750 - 20UNEF	9	2-9	60,0	25,0
14S	0.8750 - 20UNEF	11	4÷11	60,0	28,8
16S	1.0000 - 20UNEF	11	4÷11	60,0	30,5
16	1.0000 - 20UNEF	11	4÷11	70,0	30,5
18	1.1250 - 18UNEF	11/18	4÷11/7÷17	70,0	33,8
20	1.2500 - 18UNEF	11/18	4÷11/7÷17	70,0	36,9
22	1.3750 - 18UNEF	18	7÷17	70,0	39,5
24	1.5000 - 18UNEF	18/21/25	7÷17/12÷21/18÷25	80,0	43,9
28	1.7500 - 18UNS	18/21/25	7÷17/12÷21/18÷25	80,0	48,4
32	2.0000 - 18UNS	21/25	12÷21/18÷25	80,0	56,0
36	2.2500 - 16UN	21/25	12÷21/18÷25	95,0	62,4
40	2.5000 - 16UN	21/25	12÷21/18÷25	95,0	68,6

Application Notes:

- In Line Receptacle with Environmental cable clamp, suitable for shielding protection
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

In Line Receptacle with cable clamp

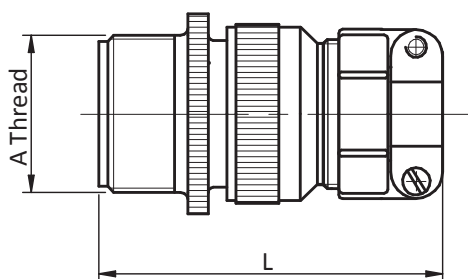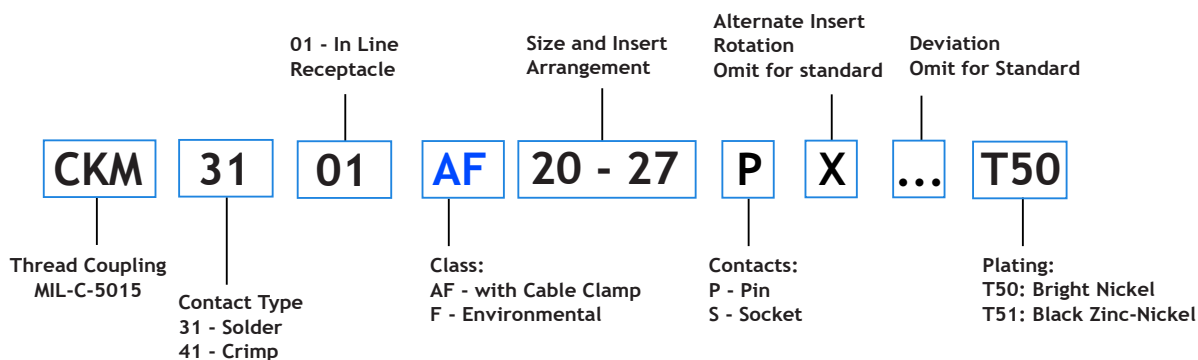



2

Shell Size	A Thread	L max	Q ±0,1
10SL	0.6250 - 24UNEF	55,0	21,8
12S	0,750-20UNEF	55,0	25,0
14S	0.8750 - 20UNEF	58,0	28,8
16S	1.0000 - 20UNEF	60,0	30,5
16	1.0000 - 20UNEF	72,0	30,5
18	1.1250 - 18UNEF	73,0	33,8
20	1.2500 - 18UNEF	74,0	36,9
22	1.3750 - 18UNEF	74,0	39,5
24	1.5000 - 18UNEF	76,0	43,9
28	1.7500 - 18UNS	83,0	48,4
32	2.0000 - 18UNS	90,0	56,0
36	2.2500 - 16UN	97,0	62,4
40	2.5000 - 16UN	115,0	68,6

Application Notes:

- In Line Receptacle with cable clamp included
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

In Line Receptacle with Metric or PG thread


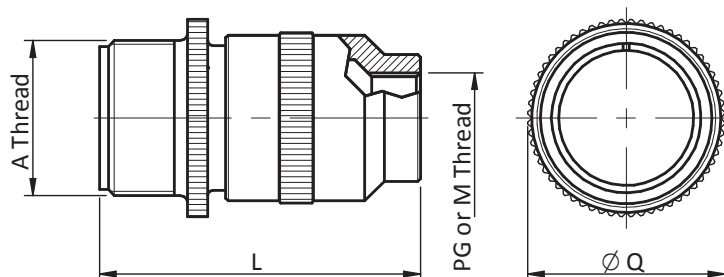
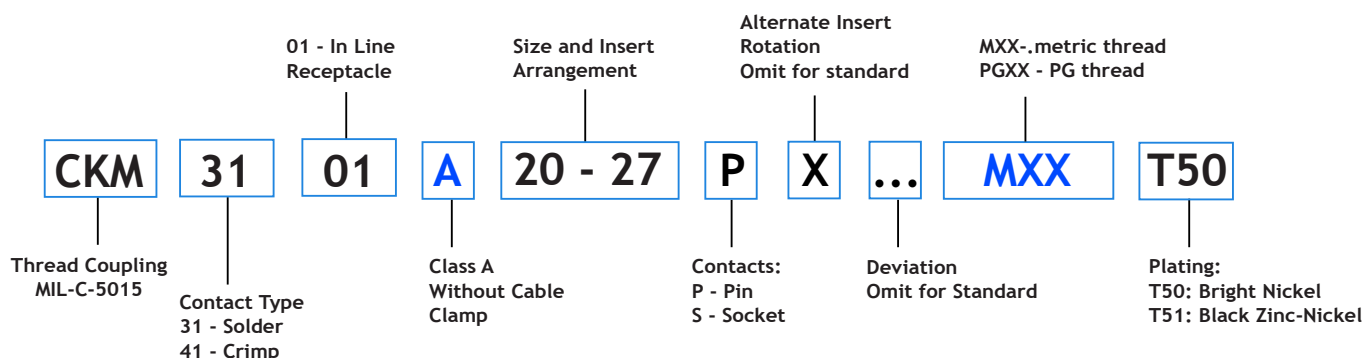


Shell Size	A Thread	MXX Fine Pitch 1,5	PGXX	L1 max	Q ±0,1
10SL	0.6250 - 24UNEF	M12	PG7/PG9/PG11	50,0	21,8
12S	0,750-20UNEF	M12	PG7/PG9/PG11	50	25,0
14S	0.8750 - 20UNEF	M16	PG11/PG16	52,5	28,8
16S	1.0000 - 20UNEF	M16	PG11/PG16	52,5	30,5
16	1.0000 - 20UNEF	M16	PG11/PG16	61,0	30,5
18	1.1250 - 18UNEF	M20	PG11//PG16/PG21	66,5	33,8
20	1.2500 - 18UNEF	M25	PG16/PG21/PG29	69,5	36,9
22	1.3750 - 18UNEF	M25	PG16/PG21/PG29	69,5	39,5
24	1.5000 - 18UNEF	M32	PG16/PG21/PG29	71,5	43,9
28	1.7500 - 18UNS	M32	PG16/PG21/PG29	76,5	48,4
32	2.0000 - 18UNS	M36	PG21/PG29	82,5	56,0
36	2.2500 - 16UN	M40	PG21/PG29	87,5	62,4
40	2.5000 - 16UN	M50	PG21/PG29/PG36	92,5	68,6

Application Notes:

- In Line Receptacle with Metric or PG internal thread. Suitable for clamp or adapter (not included)
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

Straight Plug with cable clamp Mounting thread

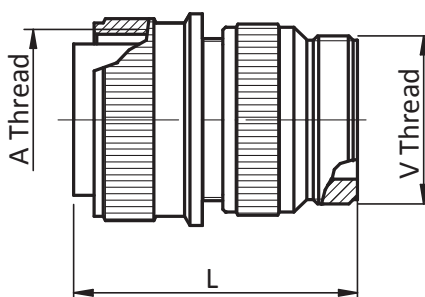
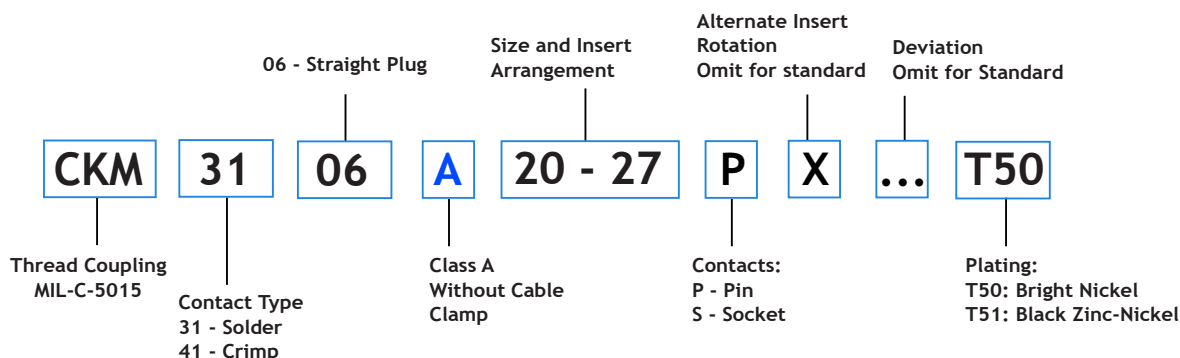


Shell Size	A Thread	L max	Q ±0,1	V Thread
10SL	0.6250 - 24UNEF	44,0	21,8	0,6250-24UNEF
12S	0,750-20UNEF	44,0	25,0	0,6250-24UNEF
14S	0.8750 - 20UNEF	45,0	28,8	0,7500-20UNEF
16S	1.0000 - 20UNEF	45,0	30,5	0,8750-20UNEF
16	1.0000 - 20UNEF	58,0	30,5	0,8750-20UNEF
18	1.1250 - 18UNEF	58,0	33,8	1,0000-20UNEF
20	1.2500 - 18UNEF	58,0	36,9	1,1875-18UNEF
22	1.3750 - 18UNEF	58,0	39,5	1,1875-18UNEF
24	1.5000 - 18UNEF	60,0	43,9	1,4375-18UNEF
28	1.7500 - 18UNS	66,0	48,4	1,4375-18UNEF
32	2.0000 - 18UNS	71,0	56,0	1,7500-18UNS
36	2.2500 - 16UN	77,0	62,4	2,0000-18UNS
40	2.5000 - 16UN	77,0	68,6	2,2500-16UN

Application Notes:

- Straight Plug with thread for clamp (not included, see Section 3)
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

Straight Plug with Environmental cable clamp


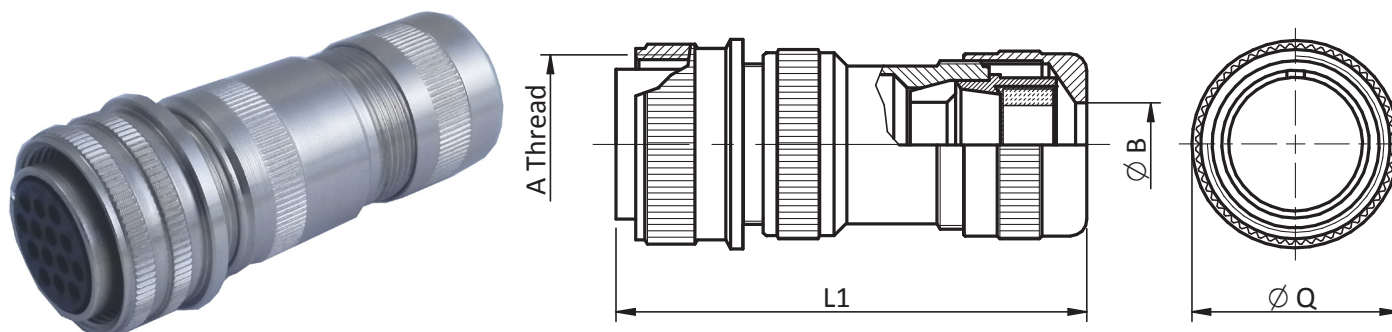
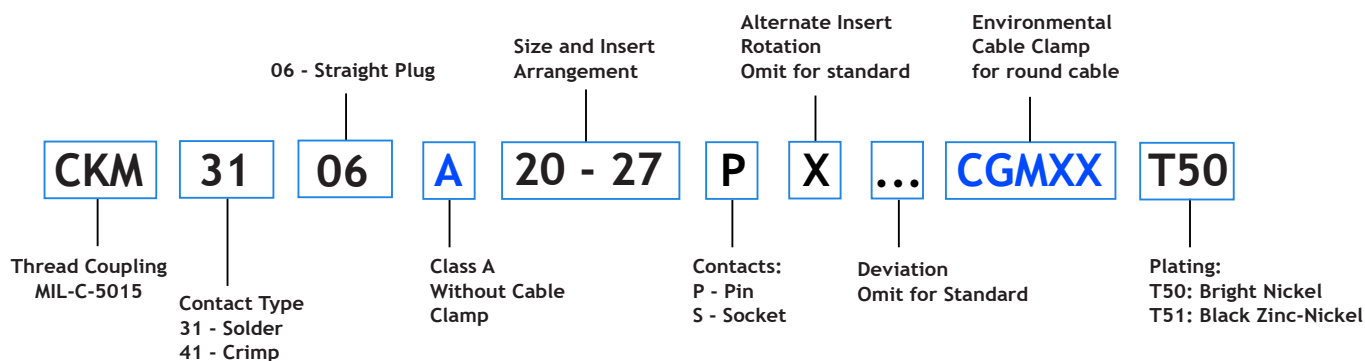


Shell Size	A Thread	XX	ØB	L1 max	Q ±0,1
10SL	0.6250 - 24UNEF	9	2÷9	60,0	21,8
12S	0,750-20UNEF	9	2-9	60,0	25,0
14S	0.8750 - 20UNEF	11	4÷11	60,0	28,8
16S	1.0000 - 20UNEF	11	4÷11	60,0	30,5
16	1.0000 - 20UNEF	11	4÷11	70,0	30,5
18	1.1250 - 18UNEF	11/18	4÷11/7÷17	70,0	33,8
20	1.2500 - 18UNEF	11/18	4÷11/7÷17	70,0	36,9
22	1.3750 - 18UNEF	18	7÷17	70,0	39,5
24	1.5000 - 18UNEF	18/21/25	7÷17/12÷21/18÷25	80,0	43,9
28	1.7500 - 18UNS	18/21/25	7÷17/12÷21/18÷25	80,0	48,4
32	2.0000 - 18UNS	21/25	12÷21/18÷25	80,0	56,0
36	2.2500 - 16UN	35*	25	95,0	62,4
40	2.5000 - 16UN	35*	25	95,0	68,6

Application Notes:

- Straight Plug with Environmental cable clamp, suitable for shielding protection
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

Straight Plug with cable clamp

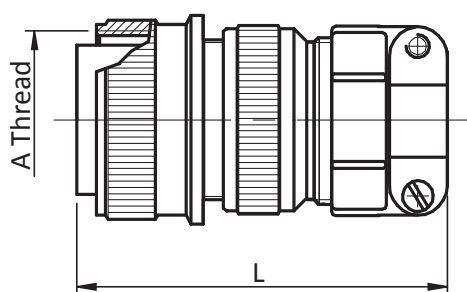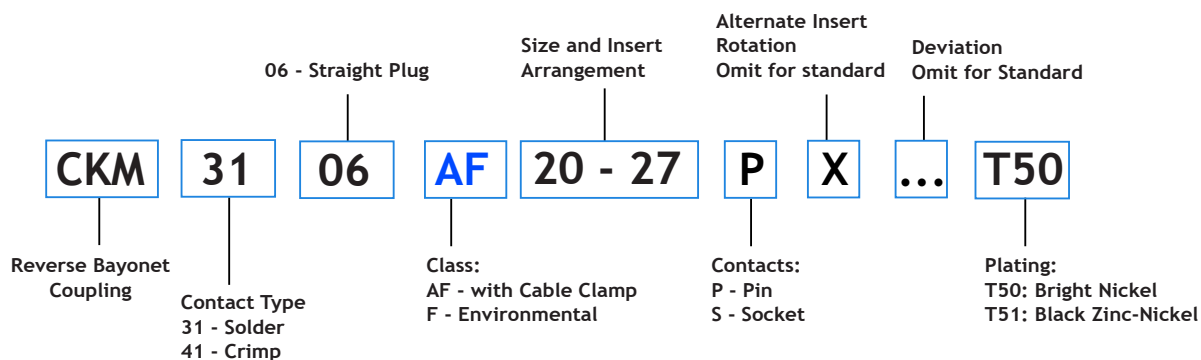




2

Shell Size	A Thread	L max	Q ±0,1
10SL	0.6250 - 24UNEF	55,0	21,8
12S	0,750-20UNEF	55,0	25,0
14S	0.8750 - 20UNEF	58,0	28,8
16S	1.0000 - 20UNEF	60,0	30,5
16	1.0000 - 20UNEF	72,0	30,5
18	1.1250 - 18UNEF	73,0	33,8
20	1.2500 - 18UNEF	74,0	36,9
22	1.3750 - 18UNEF	74,0	39,5
24	1.5000 - 18UNEF	76,0	43,9
28	1.7500 - 18UNS	83,0	48,4
32	2.0000 - 18UNS	90,0	56,0
36	2.2500 - 16UN	97,0	62,4
40	2.5000 - 16UN	115,0	68,6

Application Notes:

- Straight plug with cable clamp included
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

Straight Plug with Metric or PG thread

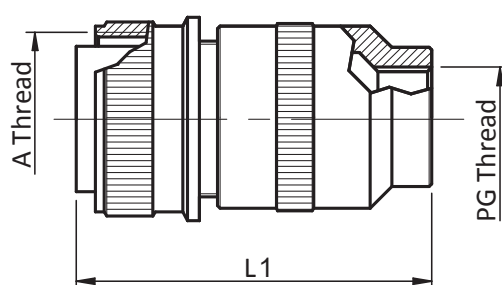
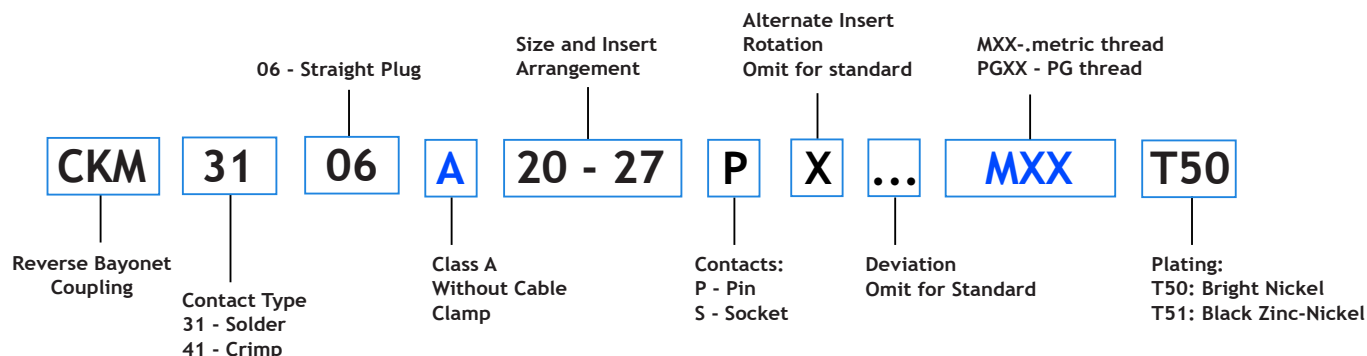


Shell Size	A Thread	MXX Fine Pitch 1,5	PGXX	L1 max	Q ±0,1
10SL	0.6250 - 24UNEF	M12	PG7/PG9/PG11	50,0	21,8
12S	0,750-20UNEF	M12	PG7/PG9/PG11	50,0	25,0
14S	0.8750 - 20UNEF	M16	PG11/PG16	52,5	28,8
16S	1.0000 - 20UNEF	M16	PG11/PG16	52,5	30,5
16	1.0000 - 20UNEF	M16	PG11/PG16	61,0	30,5
18	1.1250 - 18UNEF	M20	PG11//PG16/PG21	66,5	33,8
20	1.2500 - 18UNEF	M25	PG16/PG21/PG29	69,5	36,9
22	1.3750 - 18UNEF	M25	PG16/PG21/PG29	69,5	39,5
24	1.5000 - 18UNEF	M32	PG16/PG21/PG29	71,5	43,9
28	1.7500 - 18UNS	M32	PG16/PG21/PG29	76,5	48,4
32	2.0000 - 18UNS	M36	PG21/PG29	82,5	56,0
36	2.2500 - 16UN	M40	PG21/PG29	87,5	62,4
40	2.5000 - 16UN	M50	PG21/PG29/PG36	92,5	68,6

Application Notes:

- Straight Plug with Metric or PG internal thread. Suitable for clamp or adapter (not included)
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

90° Plug with cable clamp Mounting thread

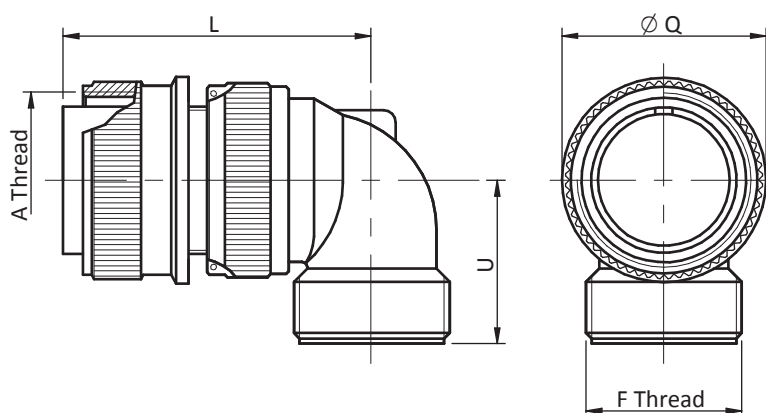
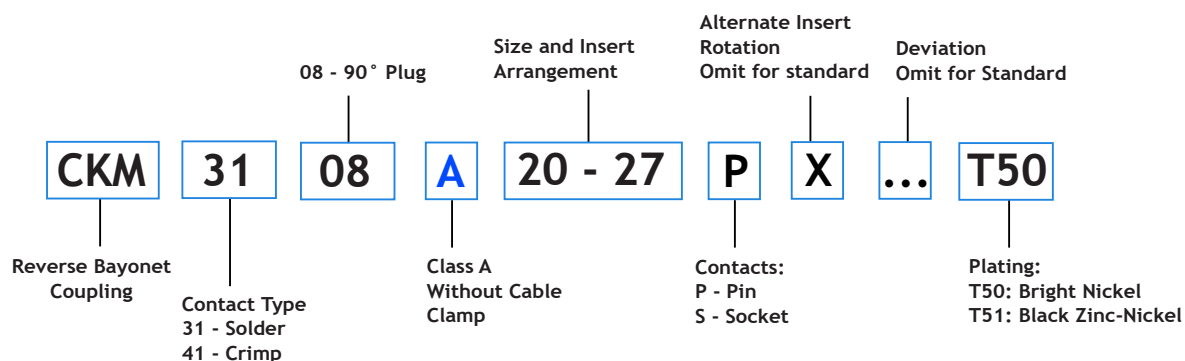


Shell Size	A Thread	L max	Q ±0,2	U max	F Thread
10SL	0.6250 - 24UNEF	40,0	21,8	25,0	0,6250-24UNEF
12S	0,750-20UNEF	44,0	25,0	25,0	0,6250-24UNEF
14S	0.8750 - 20UNEF	42,0	28,0	26,5	0,7500-20UNEF
16S	1.0000 - 20UNEF	46,0	31,5	27,0	0,8750-20UNEF
16	1.0000 - 20UNEF	55,0	31,5	27,0	0,8750-20UNEF
18	1.1250 - 18UNEF	57,0	34,0	30,0	1,0000-20UNEF
20	1.2500 - 18UNEF	62,0	37,2	32,0	1,1875-18UNEF
22	1.3750 - 18UNEF	62,0	40,4	32,0	1,1875-18UNEF
24	1.5000 - 18UNEF	67,0	43,5	37,0	1,4375-18UNEF
28	1.7500 - 18UNS	67,0	49,9	38,0	1,4375-18UNEF
32	2.0000 - 18UNS	72,0	56,0	45,5	1,7500-18UNS
36	2.2500 - 16UN	75,0	62,5	47,2	2,0000-18UNS
40	2.5000 - 16UN	78,0	69,0	52,0	2,2500-16UN

Application Notes:

- 90° Plug with Thread for cable clamp (not included, see Section 3)
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

90° Plug with Environmental cable clamp


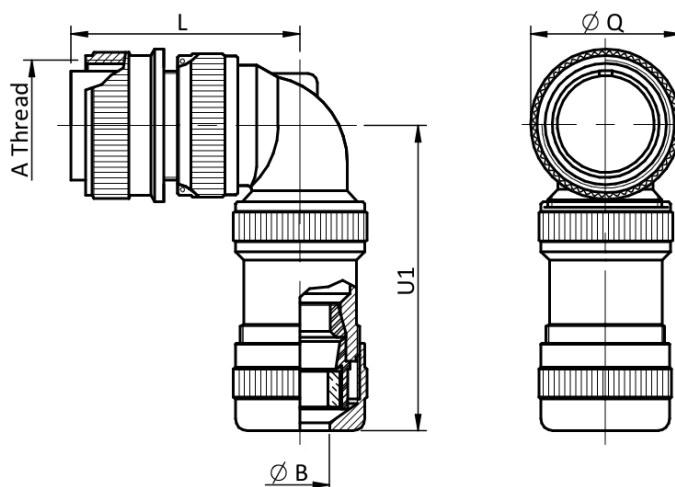
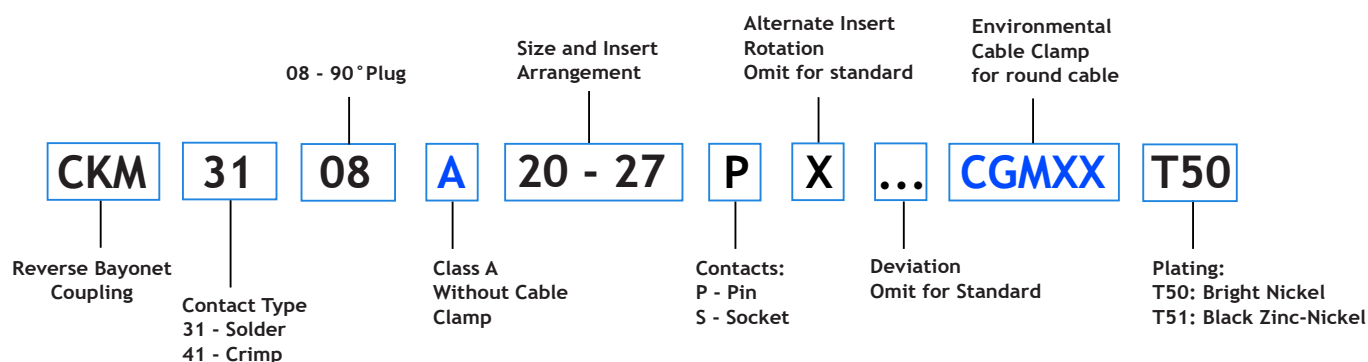


Shell Size	A Thread	XX	ØB	L max	U1 max	Q ±0,2
10SL	0.6250 - 24UNEF	9	2÷9	40,0	60,0	21,8
12S	0,750-20UNEF	9	2-9	44,0	60,0	25,0
14S	0.8750 - 20UNEF	11	4÷11	42,0	61,5	28,0
16S	1.0000 - 20UNEF	11	4÷11	46,0	60,0	31,5
16	1.0000 - 20UNEF	11	4÷11	55,0	60,0	31,5
18	1.1250 - 18UNEF	11/18	4÷11/7÷17	57,0	67,0	34,0
20	1.2500 - 18UNEF	11/18	4÷11/7÷17	62,0	69,0	37,2
22	1.3750 - 18UNEF	18	7÷17	62,0	69,0	40,4
24	1.5000 - 18UNEF	18/21/25	7÷17/12÷21/18÷25	67,0	78,0	43,5
28	1.7500 - 18UNS	18/21/25	7÷17/12÷21/18÷25	67,0	79,0	49,9
32	2.0000 - 18UNS	21/25	12÷21/18÷25	72,0	90,5	56,0
36	2.2500 - 16UN	25	25	75,0	92,2	62,5
40	2.5000 - 16UN	25	25	78,0	97,0	69,0

Application Notes:

- 90° Plug with Environmental cable clamp, suitable for shielding protection
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

90° Plug with cable clamp

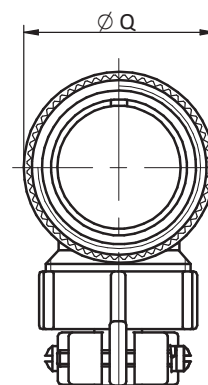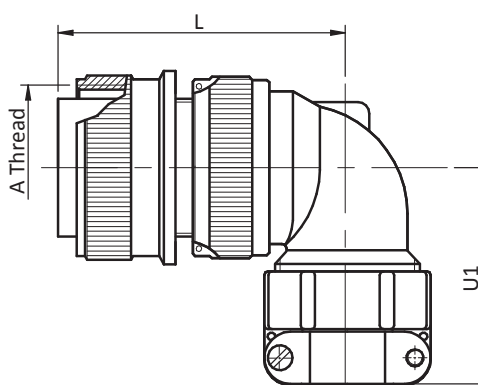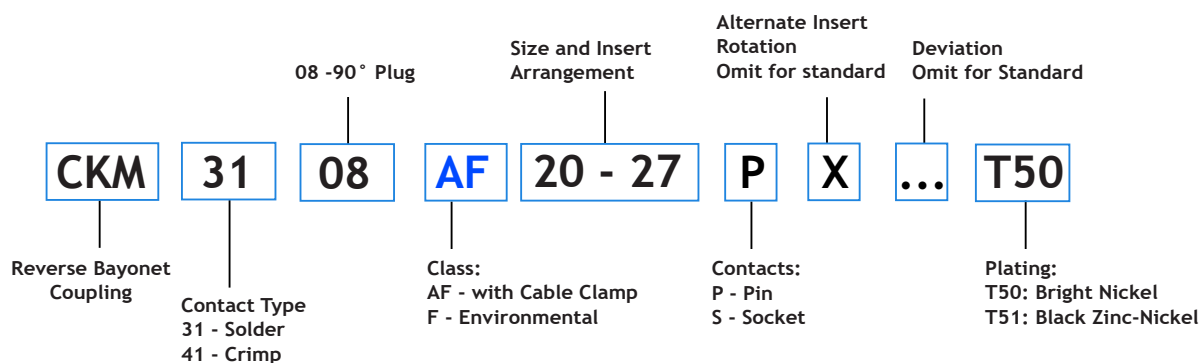



2

Shell Size	A Thread	L max	U1 max	Q ±0,1
10SL	0.6250 - 24UNEF	40,0	36,0	24,1
12S	0,750-20UNEF	40,0	36,0	25,0
14S	0.8750 - 20UNEF	42,0	38,5	28,0
16S	1.0000 - 20UNEF	46,0	41,0	31,5
16	1.0000 - 20UNEF	55,0	41,0	31,5
18	1.1250 - 18UNEF	57,0	50,0	34,0
20	1.2500 - 18UNEF	62,0	48,0	37,2
22	1.3750 - 18UNEF	62,0	48,0	40,4
24	1.5000 - 18UNEF	67,0	54,0	43,5
28	1.7500 - 18UNS	67,0	55,0	49,9
32	2.0000 - 18UNS	72,0	64,5	56,0
36	2.2500 - 16UN	75,0	67,2	62,5
40	2.5000 - 16UN	78,0	91,0	69,0

Application Notes:

- 90° Plug with cable clamp included
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

90° Plug with Metric or PG thread


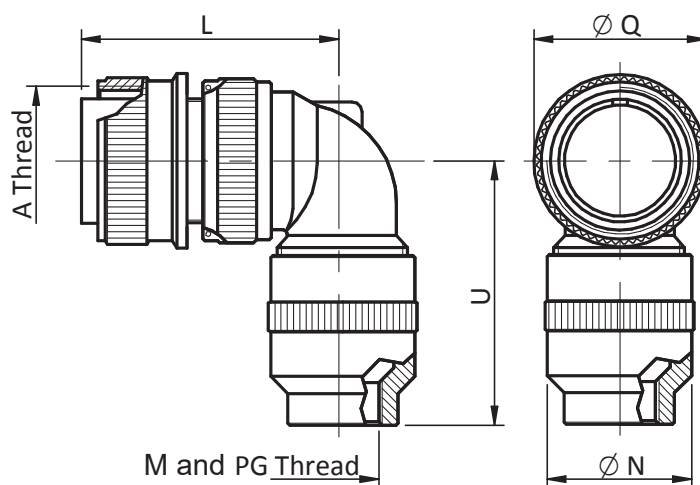
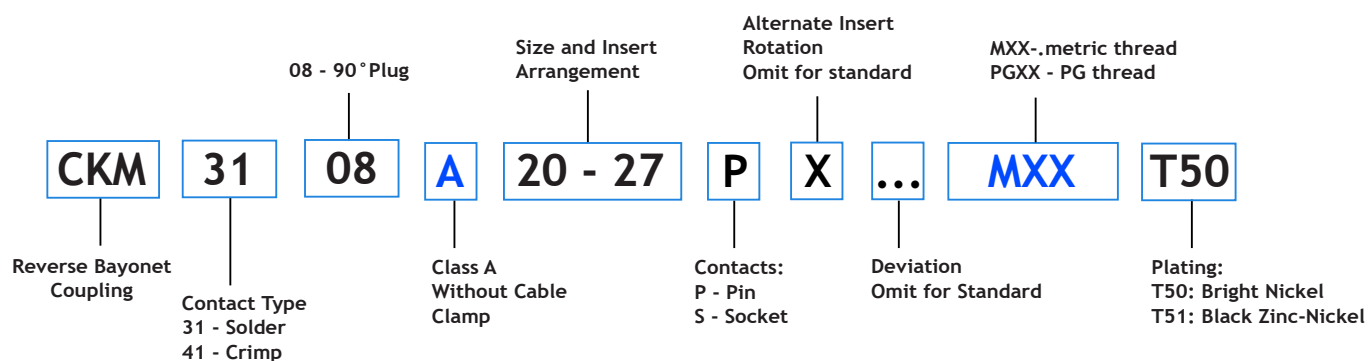


Shell Size	A Thread	MXX Fine Pitch 1,5	PGXX	L max	U max	Q ±0,1	N
10SL	0.6250 - 24UNEF	M12	PG7/PG9/PG11	40,0	50,0	24,1	24,1
12S	0,750-20UNEF	M12	PG7/PG9/PG11	40,0	51,0	25,0	26,5
14S	0.8750 - 20UNEF	M16	PG11/PG16	42,0	51,0	28,0	28,0
16S	1.0000 - 20UNEF	M16	PG11/PG16	46,0	51,5	31,5	31,5
16	1.0000 - 20UNEF	M16	PG11/PG16	55,0	51,5	31,5	31,5
18	1.1250 - 18UNEF	M20	PG11//PG16/PG21	57,0	54,5	34,0	34,0
20	1.2500 - 18UNEF	M25	PG16/PG21/PG29	62,0	56,5	37,2	37,2
22	1.3750 - 18UNEF	M25	PG16/PG21/PG29	62,0	56,5	40,4	40,4
24	1.5000 - 18UNEF	M32	PG16/PG21/PG29	67,0	61,5	43,5	43,5
28	1.7500 - 18UNS	M32	PG16/PG21/PG29	67,0	62,5	49,9	49,9
32	2.0000 - 18UNS	M36	PG21/PG29	72,0	75,0	56,0	56,0
36	2.2500 - 16UN	M40	PG21/PG29	75,0	82,0	62,5	62,5
40	2.5000 - 16UN	M50	PG21/PG29/PG36	78,0	87,5	69,0	69,0

Application Notes:

- 90° Plug with Metric or PG internal thread.Suitable for clamp or adapter (not included)
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

Front Panel Receptacle

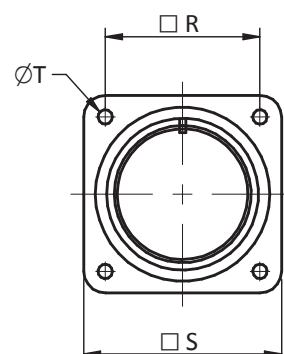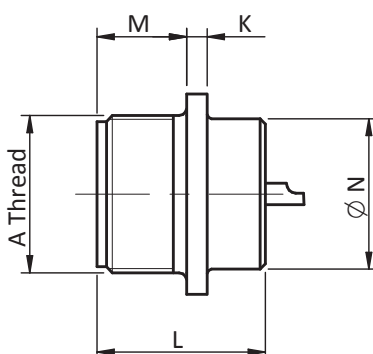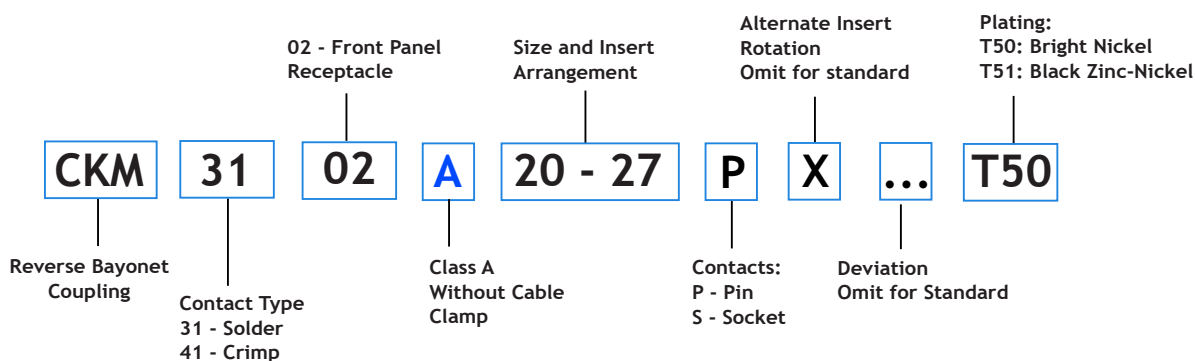


2

Shell Size	A Thread	M +0,2 / -0	K ± 0,2	L max	Ø N +0,2/-0	T +0,1/-0	S ± 0,2	R ± 0,2
10SL	0.6250 - 24UNEF	14,3	2,8	24,7	15,9	3,2	25,4	18,25
12S	0,750-20UNEF	14-5	2,8	24,7	15,9	3,2	27,8	20,62
14S	0.8750 - 20UNEF	14,5	3,3	24,7	19,0	3,2	30,4	23,0
16S	1.0000 - 20UNEF	14,5	3,3	24,7	22,2	3,2	32,5	24,60
16	1.0000 - 20UNEF	19,1	3,3	33,8	22,2	3,2	32,5	24,60
18	1.1250 - 18UNEF	19,1	4,0	34,5	25,5	3,2	35,0	27,0
20	1.2500 - 18UNEF	19,1	4,0	34,5	28,5	3,2	38,0	29,4
22	1.3750 - 18UNEF	19,6	4,0	34,5	31,7	3,2	41,0	31,75
24	1.5000 - 18UNEF	20,6	4,0	35,7	34,9	3,7	44,5	34,9
28	1.7500 - 18UNS	20,7	4,0	35,7	41,4	3,7	50,9	39,7
32	2.0000 - 18UNS	22,3	4,0	37,3	47,6	4,3	57,0	44,5
36	2.2500 - 16UN	22,3	4,0	37,3	52,4	4,3	63,5	49,2
40	2.5000 - 16UN	22,3	4,0	37,3	58,7	4,3	69,9	55,55


Application Notes:

- Front Panel Receptacle
- Standard configuration: Aluminium Alloy Shells (Stainless Steel option)
Copper Alloy Silver Plated Contacts (Gold Plated option)
Polychloroprene elastomer insulator (Fire Resistant Elastomer option)
- For other options contact the factory

Panel requirements

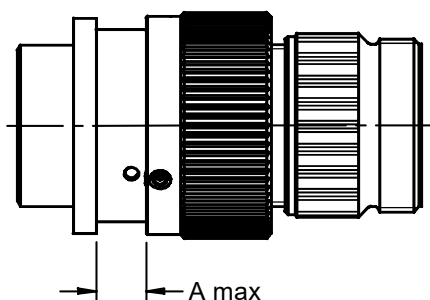

Maximum panel thickness

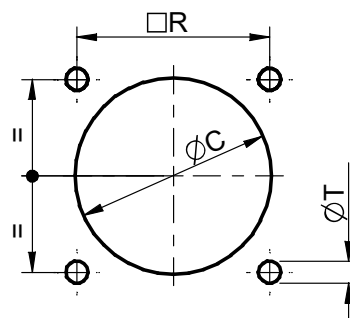

Panel cutout

Shell Size	10SL	12S	14S	16	16S	18	20	22	24	28	32	36	40
A	3,70	3,70	3,70	3,70	3,70	3,70	3,70	3,70	5,25	5,25	6,10	6,10	6,10

Shell Size	10SL	12S	14S	16	16S	18	20	22	24	28	32	36	40
C	17,0	17,0	20,0	23,0	23,0	26,5	30,0	33,0	36,0	42,0	48,5	55,0	61,0
R+-0,1	18,2	18,2	23,0	24,6	24,6	27,0	29,4	31,8	34,9	39,7	44,5	49,2	55,5
T	3,4	3,4	3,4	3,4	3,4	3,4	3,4	3,4	3,9	3,9	4,5	4,5	4,5

Plug and Receptacle Metal Caps HOW TO ORDER

CKM - **02** - **24** - **1** **C** **T50**

CKM: MIL 5015 Thread

02: 02 - Receptacle Cap
06 - Plug Cap

24: Connector Size


1: Lanyard:
1 - Stainless Chain
2 - Stainless Rope
3 - Nylon Rope

C: Terminal:
C: Screw Lug
N: Jam Nut Lug
L: Loose Crimp Lug


T50: Plating:
T50: Bright Nickel (1)
T51: Black Zinc (1)

(1) - RoHS Compliant
(2) - No RoHS Compliant

Lanyard:




Terminal:



Receptacle Cap




Plug Cap

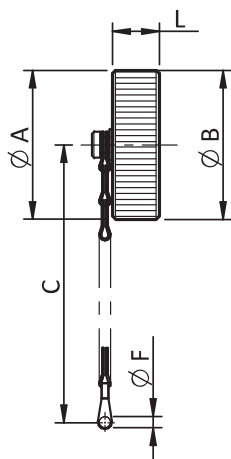

Receptacle Cap

Connector Size	ØA Max.	B Thread	C min.	L	F +0.25 -0.13
10S - 10SL	20.7	0.6250 - 24UNEF	102	11.9	3.55
12 - 12S	25.4	0.7500 - 20UNEF	115	11.9	3.55
14 - 14S	28.6	0.8750 - 20UNEF	115	11.9	3.55
16 - 16S	30.2	1.0000 - 20UNEF	115	11.9	3.55
18	34.1	1.1250 - 18UNEF	115	11.9	3.55
20	37.3	1.2500 - 18UNEF	127	11.9	3.55
22	40.4	1.3750 - 18UNEF	127	11.9	3.55
24	43.6	1.5000 - 18UNEF	140	11.9	4.30
28	50.0	1.7500 - 18UNS	197	13.5	4.30
32	56.3	2.0000 - 18UNS	197	13.5	4.80
36	62.7	2.2500 - 16UN	197	13.5	4.80
40	69.0	2.5000 - 16UN	197	13.5	4.80

For Additional Information or Different Requests, Please Contact the Factory

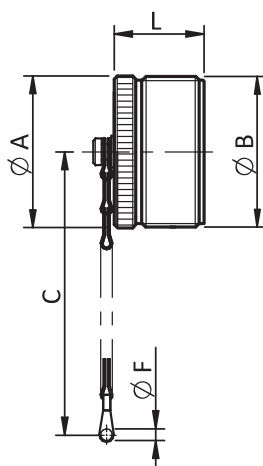

Plug Cap

Connector Size	ØA Max.	B Thread	C min.	L	F +0.25 -0.13
10S - 10SL	17.4	0.6250 - 24UNEF	102	16.6	3.95
12 - 12S	20.6	0.7500 - 20UNEF	115	21.4	3.95
14 - 14S	23.7	0.8750 - 20UNEF	115	21.4	3.95
16 - 16S	26.9	1.0000 - 20UNEF	115	21.4	3.95
18	30.0	1.1250 - 18UNEF	115	21.4	3.95
20	33.0	1.2500 - 18UNEF	127	21.4	4.80
22	36.4	1.3750 - 18UNEF	127	21.4	4.80
24	39.6	1.5000 - 18UNEF	140	21.4	4.80
28	46.0	1.7500 - 18UNS	197	21.4	4.80
32	52.0	2.0000 - 18UNS	197	21.4	5.60
36	58.7	2.2500 - 16UN	197	21.4	5.60
40	65.0	2.5000 - 16UN	197	21.4	5.60

For Additional Information or Different Requests, Please Contact the Factory

ACCESSORIES

General Duty Cable Clamp

3057 - 20 A - T50

Cable Clamp

Size

General
Duty

Plating:
T50: Bright Nickel (*)
T51: Black Zinc (*)

(*) - RoHS Compliant



Technical Data

Part Number	Shell Size	Sleeve to Use	ØA	ØB	C	L	F Thread
3057-4A	10 SL	3420 - 4	25.0	8.2	10.2	21.0	0.6250 - 24UNEF
3057-6A	14 S	3420 - 4 / 6	27.0	11.2	10.2	22.2	0.7500 - 20UNEF
3057-8A	16 S - 16	3420 - 6 / 8	28.0	14.2	10.2	24.0	0.8750 - 20UNEF
3057-10A	18	3420 - 6 / 10	33.0	16.0	10.2	28.5	1.0000 - 20UNEF
3057-12A	20 - 22	3420 - 8 / 12	35.0	19.0	10.2	24.0	1.1875 - 18UNEF
3057-16A	24 - 28	3420 - 8 / 12 / 16	43.0	23.8	10.5	26.0	1.4375 - 18UNEF
3057-20A	32	3420 - 12 / 16 / 20	51.0	31.7	12.5	28.0	1.7500 - 18UNS
3057-24A	36	3420 - 16 / 18 / 24	58.0	35.0	14.0	29.4	2.0000 - 18UNS
3057-28A	40	3420 - 16 / 20 / 28	65.0	41.2	14.0	42.8	2.2500 - 16UN

For Additional Information or Different Requests, Please Contact the Factory

Water Tight Cable Clamp

3057 - 20 C - T50

Cable Clamp

Size

Environmental

Plating:
T50: Bright Nickel (*)
T51: Black Zinc (*)


(*) - RoHS Compliant



Technical Data

Part Number	Shell Size	Sleeve to Use	ØA	ØB	C	L	F Thread
3057-4C	10 SL	3420 - 4A	25.0	8.2	10.2	21.0	0.6250 - 24UNEF
3057-6C	14 S	3420 - 4A / 6A	27.0	11.2	10.2	22.2	0.7500 - 20UNEF
3057-8C	16 S - 16	3420 - 6A / 8A	28.0	14.2	10.2	24.0	0.8750 - 20UNEF
3057-10C	18	3420 - 6A / 10A	33.0	16.0	10.2	28.5	1.0000 - 20UNEF
3057-12C	20 - 22	3420 - 8A / 12A	35.0	19.0	10.2	24.0	1.1875 - 18UNEF
3057-16C	24 - 28	3420 - 8A / 12A / 16A	43.0	23.8	10.5	26.0	1.4375 - 18UNEF
3057-20C	32	3420 - 12A / 16A / 20A	51.0	31.7	12.5	28.0	1.7500 - 18UNS
3057-24C	36	3420 - 16A / 18A / 24A	58.0	35.0	14.0	29.4	2.0000 - 18UNS
3057-28C	40	3420 - 16A / 20A / 28A	65.0	41.2	14.0	42.8	2.2500 - 16UN

For Additional Information or Different Requests, Please Contact the Factory

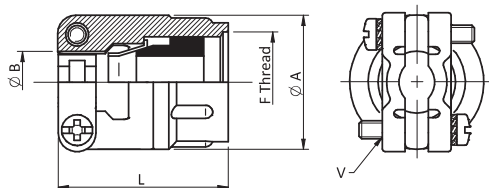

ACCESSORIES


Neoprene Sleeves for 3057-A Clamp

CK 3420 - 20

Neoprene Sleeves for
Cable Clamp

Size

Omit for
3057-XXA Clamp

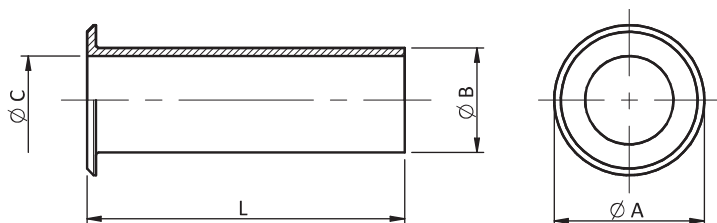

Technical Data

Part Number	ØA ±0.1	ØB ±0.1	ØC ±0.1	L ±0.1
CK 3420 - 4	12.8	7.67	5.58	69.8
CK 3420 - 6	15.7	10.84	7.92	66.8
CK 3420 - 8	18.8	14.02	11.09	63.5
CK 3420 - 10	22.0	15.62	14.27	60.3
CK 3420 - 12	27.0	18.79	15.87	57.1
CK 3420 - 16	33.3	23.54	19.05	53.9
CK 3420 - 20	40.5	31.49	23.79	50.8
CK 3420 - 24	46.9	34.67	31.75	47.6
CK 3420 - 28	52.9	40.99	34.92	44.4

3

Neoprene Sleeves for 3057-XXA Clamp


CK 3420 - 20

A

Neoprene Sleeves for
Cable Clamp

Size

For 3057-XXA Clamp

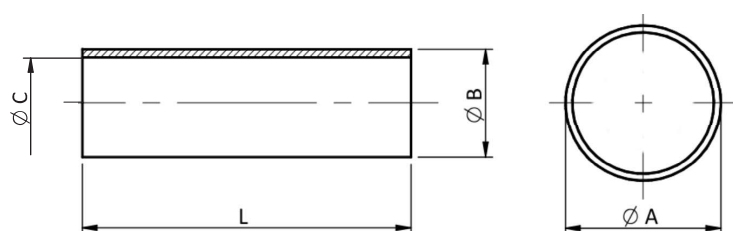


Technical Data


Part Number	ØB ±0.1	ØC ±0.1	L ±0.1
CK 3420 - 4A	7.63	5.56	50.5
CK 3420 - 6A	10.50	7.93	50.5
CK 3420 - 8A	13.50	11.10	50.5
CK 3420 - 10A	15.70	11.10	50.5
CK 3420 - 12A	18.50	13.74	50.9
CK 3420 - 16A	23.60	19.00	50.9
CK 3420 - 20A	31.10	23.80	50.2
CK 3420 - 24A	33.90	28.50	51.1
CK 3420 - 28A	40.60	31.80	50.2
CK 3420 - 29A	45.00	41.00	50.5

ACCESSORIES

Gasket for Receptacles




Conductive



Non Conductive
Neoprene rubber

Front Panel Receptacle B096 - 20 -

Omit for Non Conductive
S : Conductive

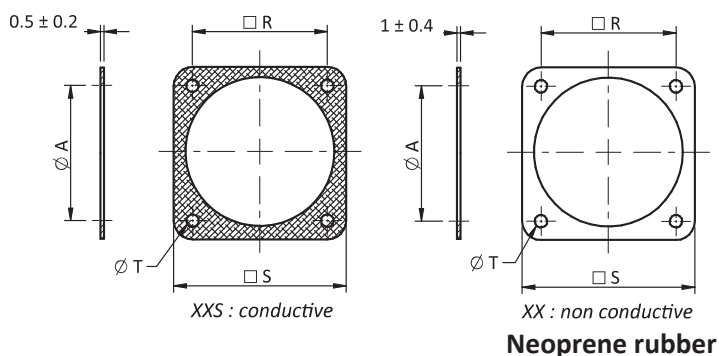


Technical Data

Part Number	Shell Size	ϕA +1	R ± 0.2	S ± 0.5	ϕT +0.5
B096 - 10	10SL	15.7	18.2	25.4	4.2
B096 - 14	14S	22.1	23.0	30.0	4.2
B096 - 16	16S - 16	25.3	24.6	32.5	4.2
B096 - 18	18	28.4	27.0	35.0	4.2
B096 - 20	20	31.6	29.4	38.0	4.2
B096 - 22	22	34.8	31.8	41.0	4.2
B096 - 24	24	38.0	34.9	44.5	4.2
B096 - 28	28	44.3	39.7	50.8	5.1
B096 - 32	32	50.7	44.5	57.0	5.1
B096 - 36	36	57.0	49.2	63.5	5.1
B096 - 40	40	61.9	55.5	69.9	5.1

For Additional Information or Different Requests, Please Contact the Factory

Rear Panel Receptacle C096 - 20 -

Omit for Non Conductive
S : Conductive

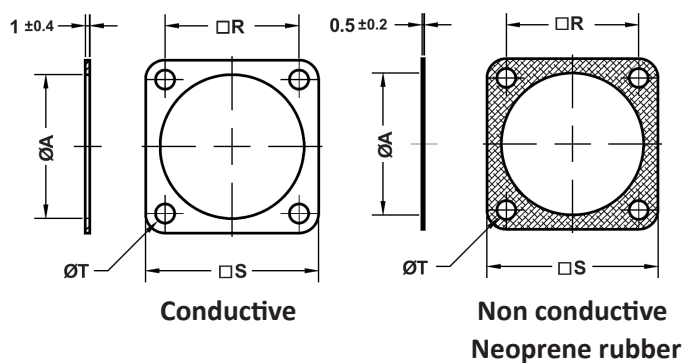


Technical Data

Part Number	Shell Size	A +0,3	R +0,2	S +0,5	T +0,5	T +0,1/-0	S $\pm 0,2$	R $\pm 0,2$
C096-10	10SL	18,2	18,2	25,4	4,2	3,2	25,4	18,25
C096-12	12S	19,5	20,62	27,8	4,2	3,2	27,8	20,62
C096-14	14S	24,6	23,0	30<0	4,2	3,2	30,4	23,0
C096-16	16S-16	27,4	24,6	32,5	4,2	3,2	32,5	24,60
C096-18	18	30,8	27,0	35,0	4,2	3,2	32,5	24,60
C096-20	20	34,2	29,4	38,0	4,2	3,2	35,0	27,0
C096-22	22	37,4	31,8	41,0	4,2	3,2	38,0	29,4
C096-24	24	40,9	34,9	44,5	4,2	3,2	41,0	31,75
C096-28	28	46,7	39,7	50,8	5,1	3,7	44,5	34,9
C096-32	32	53,4	44,5	57,0	5,1	3,7	50,9	39,7
C096-36	36	59,6	49,2	63,5	5,1	4,3	57,0	44,5
C096-40	40	65,5	55,5	69,9	5,1	4,3	63,5	49,2

For Additional Information or Different Requests, Please Contact the Factory

PIN CRIMP CONTACTS

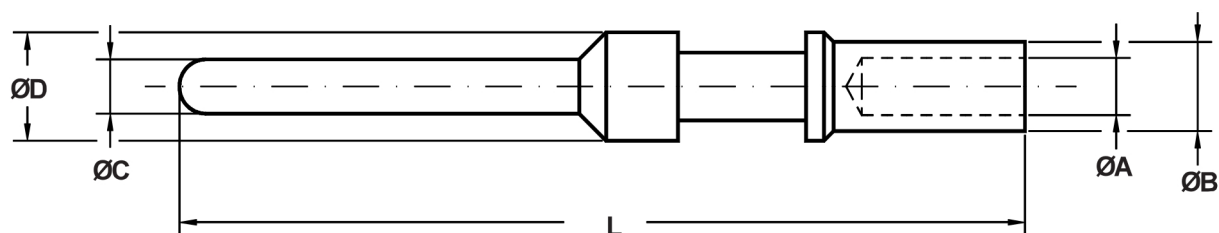

B001 - 16 PC - T01

Contact

Size

Male
Contact



Omitted
for STD
Modified - XX

T01 : Silver Plated (Standard)
T03 : Gold Plated (Option)

Part Number	Size	Section mm ²	AWG	A +/-0,1	B +/-0,1	C +/-0,5	D +/-0,1	L +/-0,1	Modified XX
B001-18PC T01	18	0,15/0,6	26/20	1,3	1,93	1,4	2,2	29,6	STD
B001-16SPC T01	16S	1/1,5	18/16	1,7	2,60	1,58	3,2	26,65	STD
B001-16SPC-13 T01	16S	0,15/0,6	26/20	1,3	1,93	1,58	3,2	26,65	-13
B001-16SPC-15 T01	16S	1	18	1,5	2,60	1,58	3,2	26,65	-13
B001-16SPC-20 T01	16S	2	14	2	2,90	1,58	3,2	26,65	-20
B001-16SPC-26 T01	16S	3	12	2,50	3,80	1,58	3,2	26,65	-26
B001-16PC T01	16	1/1,5	18/16	1,7	2,60	1,58	3,2	31,75	STD
B001-16PC-08 T01	16	0,15/0,20	26/24	0,85	1,55	1,58	3,2	31,75	-08
B001-16PC-12 T01	16	0,6	20	1,2	2,60	1,58	3,2	31,75	-12
B001-16PC-13 T01	16	0,15/0,6	26/20	1,3	1,93	1,58	3,2	31,75	-13
B001-16PC-15 T01	16	1	18	1,50	2,60	1,58	3,2	31,75	-15
B001-16PC-20 T01	16	2	14	2	2,90	1,58	3,2	31,75	-20
B001-16PC-22 T01	16	2,5		2,2	3,80	1,58	3,2	31,75	-22
B001-16PC-26 T01	16	3	12	2,50	3,80	1,58	3,2	31,75	-26
B001-12PC T01	12	3	12	2,50	3,90	2,38	4,8	37,65	STD
B001-12PC-12 T01	12	0,60	20	1,20	2,60	2,38	4,8	37,65	-12
B001-12PC-15 T01	12	1	18	1,50	2,60	2,38	4,8	37,65	-15
B001-12PC-20 T01	12	1/2	18/14	2,00	3,80	2,38	4,8	37,65	-20
B001-12PC-22 T01	12	2,5		2,10	3,80	2,38	4,8	37,65	-22
B001-12PC-30 T01	12	4		3,00	4,80	2,38	4,8	37,65	-30
B001-12PC-38 T01	12	6		3,60	4,80	2,38	4,8	37,65	-38
B001-8PC T01	8	9	8	4,50	6,90	3,60	7,8	42,00	STD
B001-8PC-38 T01	8	6		3,6	6,80	3,60	7,8	42,00	-38
B001-8PC-50 T01	8	10		5,00	6,90	3,60	7,8	42,00	-50
B001-4PC T01	4	22	4	7,15	9,53	5,7	11,00	42,00	STD
B001-4PC T01-50	4	10		5,00	6,90	5,70	11,00	42,00	-50
B001-0PC T01	0	50/60	0	11,5	14,30	9,05	15,1	45,00	STD
B001-0PC-35 T01	0	35	0	9	14,35	9,05	15,1	45,00	-35

All crimp connectors includes silver plated contacts (T01 suffix).
Standard and modified contacts can be supplied as spare parts.
See our "Assembly Catalogue".

SOCKET CRIMP CONTACTS

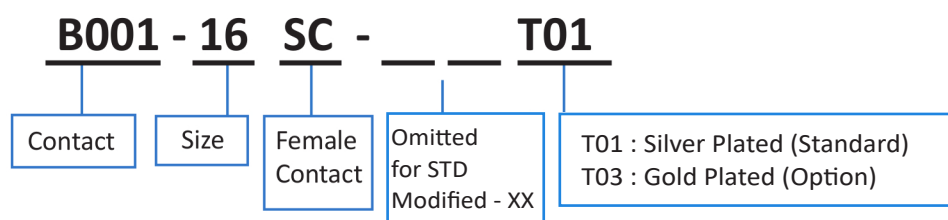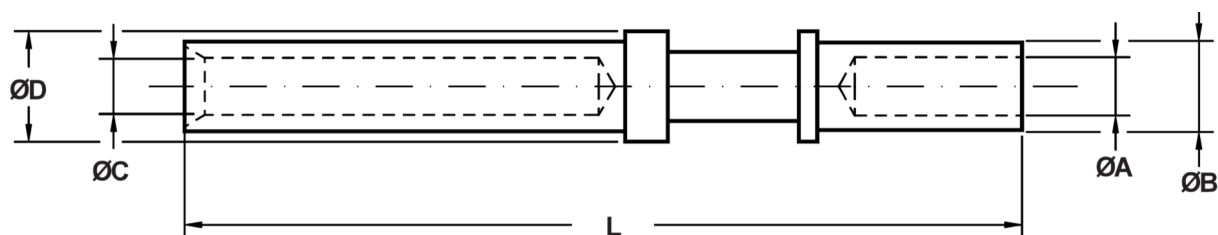

Part Number	Size	Section mm ²	AWG	A +/-0,1	B +/-0,1	C +/-0,5	D +/-0,1	L +/-0,1	Modified XX
B001-18SC T01	18	0,15/0,6	26/20	1,30	1,93	1,48	2,2	34,40	STD
B001-16SSC T01	16S	1/1,5	18/16	1,70	2,60	1,65	3,2	26,65	STD
B001-16SSC-13 T01	16S	0,15/0,6	26/20	1,30	1,93	1,65	3,2	26,65	-13
B001-16SSC-15 T01	16S	1	18	1,50	2,60	1,65	3,2	26,65	-13
B001-16SSC-20 T01	16S	2	14	2,00	2,90	1,65	3,2	26,65	-20
B001-16SSC-26 T01	16S	3	12	2,50	3,80	1,65	3,2	26,65	-26
B001-16SC T01	16	1/1,5	18/16	1,70	2,60	1,65	3,2	36,50	STD
B001-16SC-08 T01	16	0,15/0,20	26/24	0,85	1,55	1,65	3,2	36,50	-08
B001-16SC-12 T01	16	0,6	20	1,2	2,60	1,65	3,2	36,50	-12
B001-16SC-13 T01	16	0,15/0,6	26/20	1,30	1,93	1,65	3,2	36,50	-13
B001-16SC-15 T01	16	1	18	1,50	2,60	1,65	3,2	36,50	-15
B001-16SC-20 T01	16	1/2	18/14	2,00	3,80	1,65	3,2	36,50	-20
B001-16SC-22 T01	16	2,5		2,20	3,80	1,65	3,2	36,50	-22
B001-16SC-26 T01	16	3	12	2,50	3,80	1,65	3,2	36,50	-26
B001-12SC T01	12	3	12	2,50	3,90	2,48	4,8	37,65	STD
B001-12SC-12 T01	12	0,60	20	1,20	2,60	2,48	4,8	37,65	-12
B001-12SC-15 T01	12	1	18	1,50	2,60	2,48	4,8	37,65	-15
B001-12SC-20 T01	12	1/2	18/14	2,00	3,80	2,48	4,8	37,65	-20
B001-12SC-22 T01	12	2,5		2,10	3,80	2,48	4,8	37,65	-22
B001-12SC-30 T01	12	4		3,00	4,80	2,48	4,8	37,65	-30
B001-12SC-38 T01	12	6	10	3,60	4,80	2,48	4,8	37,65	-38
B001-8SC T01	8	9	8	4,50	6,75	3,70	7,8	40,50	STD
B001-8SC-38 T01	8	6		3,6	6,80	3,70	7,8	40,50	-38
B001-8SC-50 T01	8	10		5,00	6,90	3,70	7,8	40,50	-50
B001-4SC T01	4	22	4	7,10	9,53	5,80	11,00	41,00	STD
B001-4PC T01-50	4	10		5,00	6,80	5,80	22,00	41,00	-50
B001-0SC T01	0	50/60	0	11,50	14,30	9,05	15,1	44,60	STD
B001-0SC-35 T01	0	35	0	9,00	14,35	9,17	15,1	44,60	-35

All crimp connectors includes silver plated contacts (T01 suffix).

Standard and modified contacts can be supplied as spare parts.

See our "Assembly Catalogue".

INDEX

Section 1 : Technical Reference

Introducing KCB Connector Series	page 1
Technical Data	page 2
Electrical characteristics	page 3
Insert arrangements tables	page 4

Section 2 : Classes and Styles

How To Order	page 25
Classes and Styles	page 26
CKM3100A	page 28
CKM3100A...CGM	page 29
CKM3100AF	page 30
CKM3100A...M/CKM3100A...PG	page 31
CKM3101A.....	page 32
CKM3101A...CGM	page 33
CKM3101AF	page 34
CKM3101A..M/CKM3101A..PG	page 35
CKM3106A	page 36
CKM3106A..CGM	page 37
CKM3106AF	page 38
CKM3106A..M/CKM3106A..PG	page 39
CKM3108A	page 40
CKM3108A..CGM	page 41
CKM3108AF	page 42
CKM3108A..M/CKM3108A..PG	page 43
CKM3102A	page 44
Panel Requirements Cutout	page 45

Section 3 : Accessories

CKM02...C Receptacle Cap	page 46
3057- A General Duty Cable Clamp	page 47
3057- C Environmental Cable Clamp	page 47
3420- Neoprene Sleeves	page 48
3420- A Neoprene Sleeves	page 48
B096- Front Mount Receptacle Gasket	page 49
C096- Rear Mount Receptacle Gasket	page 49
B001 PC Pin Crimp Contacts	page 50
B001 SC Socket Crimp Contacts	page 51
Index	page 52
Other Connectors and Products	

OTHER CONNECTORS AND PRODUCTS




CKM CONNECTORS

MIL-C-5015 POWER AND SIGNAL THREADED CONNECTORS FOR RUGGED MILITARY AND INDUSTRIAL APPLICATIONS





CKP CONNECTORS

MIL-C-26482 HIGH DENSITY SIGNAL BAYONET CONNECTORS FOR RUGGED MILITARY AND INDUSTRIAL APPLICATIONS





CKB CONNECTORS

MIL-C-5015 REVERSE BAYONET POWER AND SIGNAL CONNECTORS FOR HARSH ENVIRONMENTAL APPLICATIONS





CONNETTORI PNEUMATICI ED ELETTROPNEUMATICI




CONNETTORI PER ALTE TEMPERATURE

CARATTERISTICHE TECNICHE IN ACCORDO ALLE NORME MIL-DTL-5015, MIL-DTL-26482 E VG95234 PER TEMPERATURE FINO A 250 °C




SERIE CKV

CONNETTORI METRICI PER IMPIEGHI GRAVOSI ED ELEVATE PRESTAZIONI





SERIE CKGE

CONNETTORI DI POTENZA VG96929 E VG95234 COMPATIBILI





SERIE CKZ

CONNETTORI CIRCOLARI AD ELEVATE PRESTAZIONI





SERIE CKO

CAVI TRASMISSIONE DATI AD ELEVATE PRESTAZIONI





Connectors and Accessories

Huge Connectors Experience

Deep Industrial Market Knowledge

Really Customer Oriented

CONNITEK S.r.l.

Via Puccini, 26
40055 - Villanova di Castenaso
Bologna - Italy
Tel.: +39 051 / 4380258
Fax.: +39 051 / 4380259
e-mail: sales@connitek.it
www.connitek.it

CONNITEK S.r.l. Authorized Reseller